NOVA FLEX

Flexible Grazer Test Report

Light efficiency:

71 Lumen/Watt

Light quality:

CRI: 84.4

Color temperature:

2962 K

Output: 567 lm
Peak: 2122 cd

Power: 8.0 W
PF: 1.0


Tracking number: VT250728-002932

Product name:
GRZ Black 12 24 30 Glare


Item number:
1 foot Flex Grazer Black 3000K 12° Glare Shield

Date and time:
7/28/25 11:59:51 AM

All values scaled to 1 foot
From 0.75 M sample tested @ 11 M

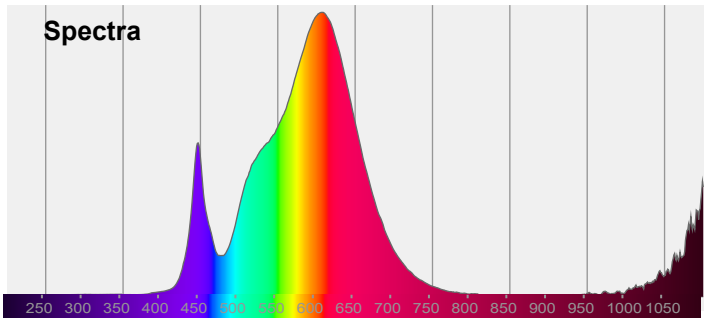


Average Beam Angle

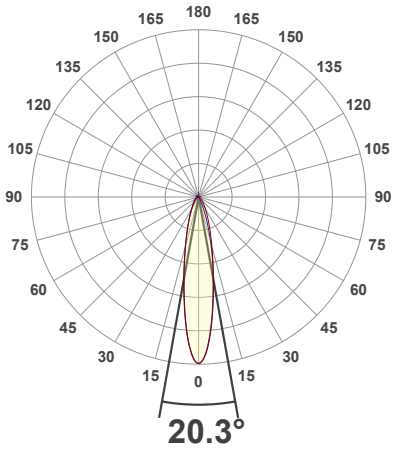


C Plane Resolution: 5°

Angular Distribution 0 ° Plane

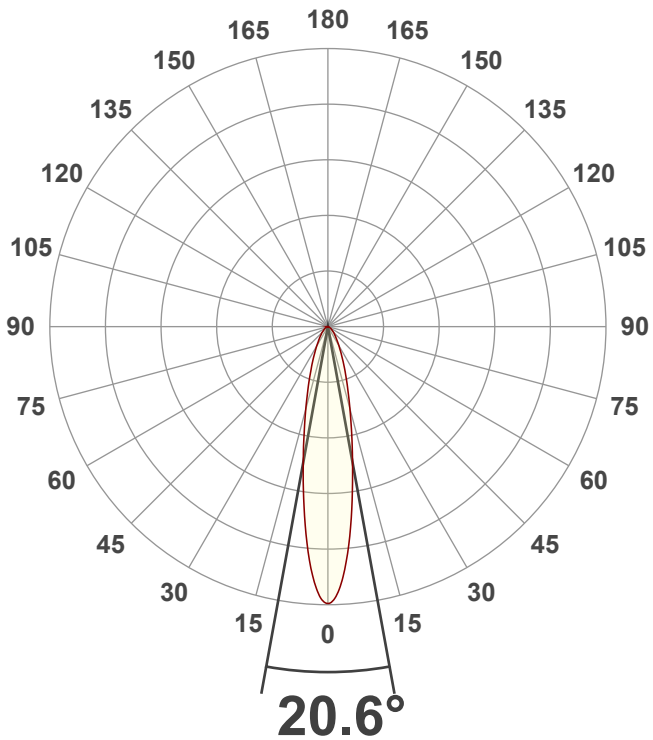



Angular Distribution 90 ° Plane

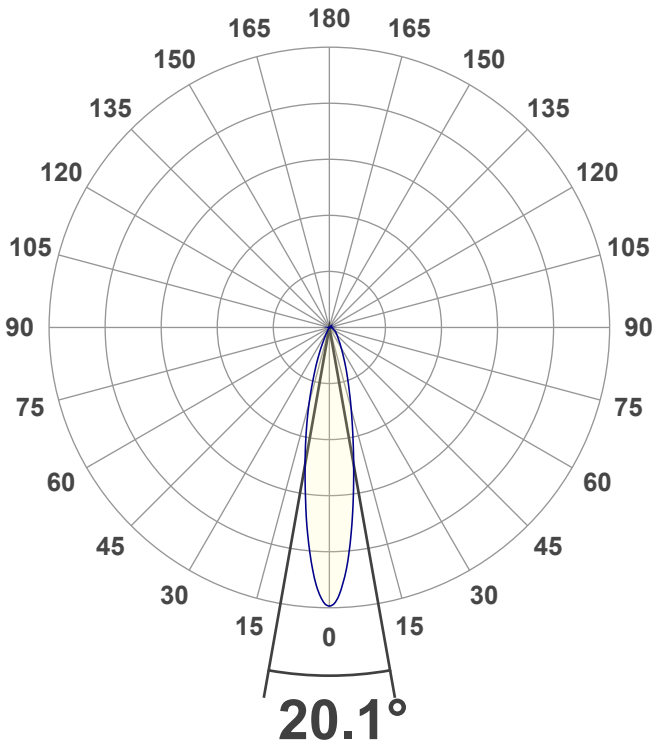


NOVA FLEX

Color details

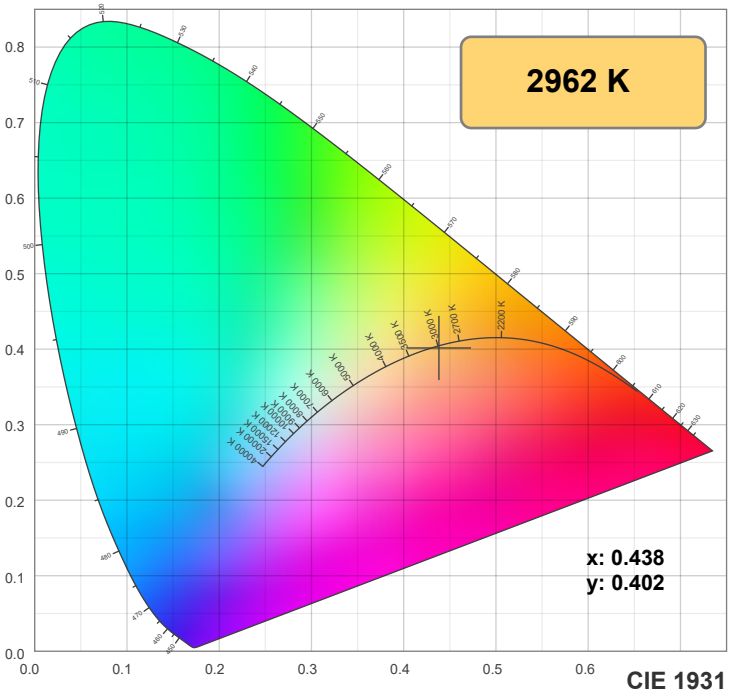


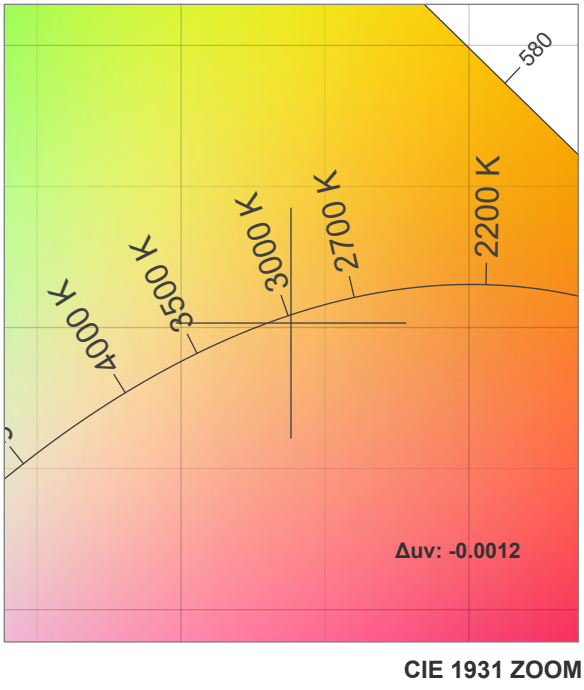

TM-30: 84.7

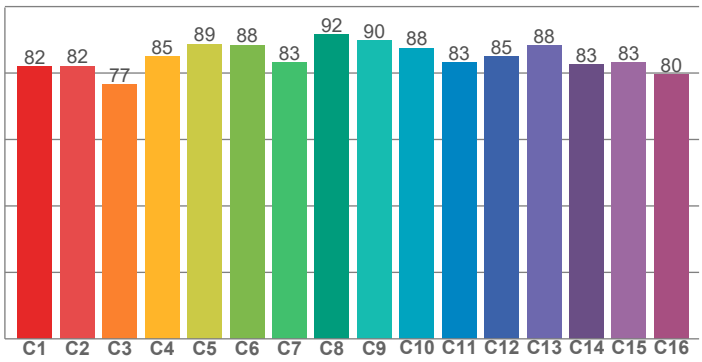

CRI: (R1-R8): 84.4

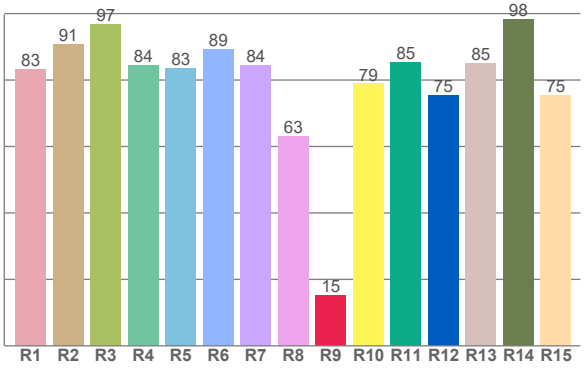

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
83.3	90.6	96.8	84.4	83.4	89.2	84.4	63.0	15.1	78.9	85.3	75.3	85.0	98.3	75.4


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
82.0	82.2	76.6	84.9	88.8	88.5	83.1	91.5	89.8	87.5	83.1	85.0	88.3	82.7	83.2	79.7

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
77.0	96.4	82.5	82.4	84.5	82.9	82.7	86.0	96.2	88.1	86.1	84.0	83.6	73.1	74.2

CQS: 82.6

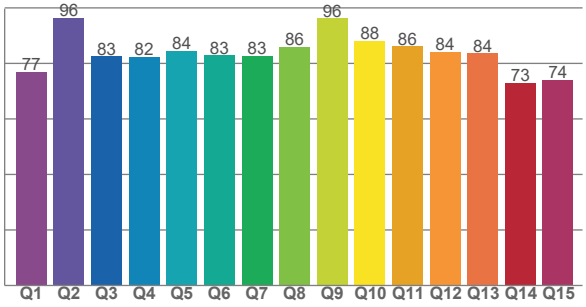

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color diviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2962 K	84.4	15.1	84.7	99.3	82.6	0.438	0.402	0.252	0.347	-0.0012

NOVA FLEX

TM-30 details


Rf 84.7


Fidelity index Rf


Rg 99.3


Gamut index Rg


		Shifts (%)	
Hue Bin	R_f	Chroma	Hue
1	82	-10%	-2%
2	82	-8%	7%
3	77	-2%	12%
4	85	4%	9%
5	89	7%	6%
6	88	7%	-2%
7	83	2%	-11%
8	92	-1%	-5%
9	90	-5%	-2%
10	88	-6%	4%
11	83	-3%	11%
12	85	5%	5%
13	88	7%	-4%
14	83	6%	-13%
15	83	0%	-10%
16	80	-7%	-15%

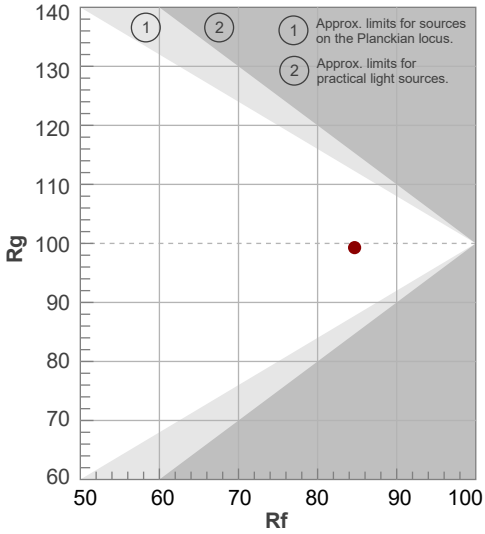


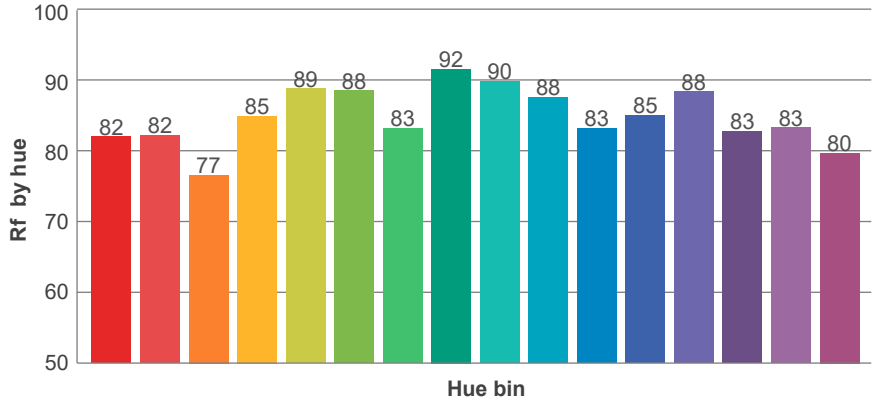

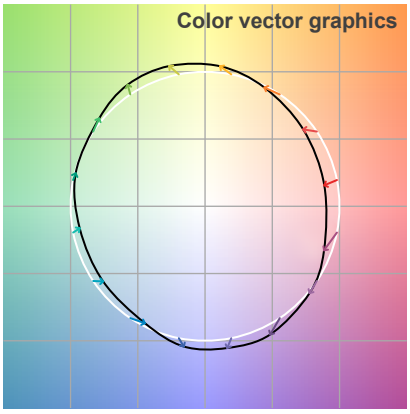

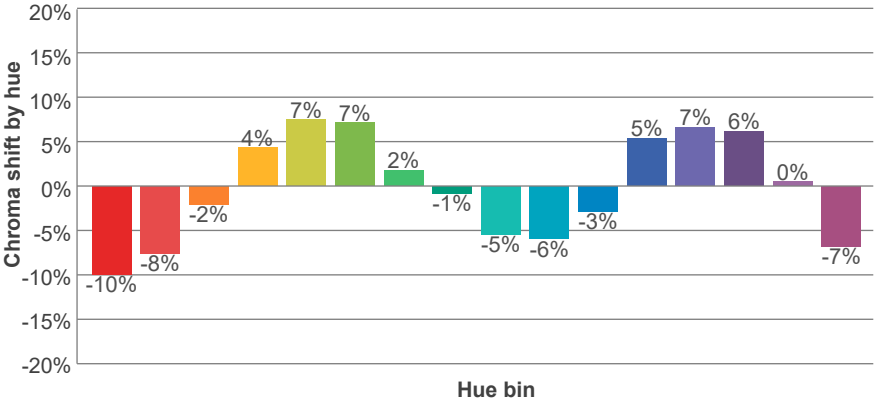


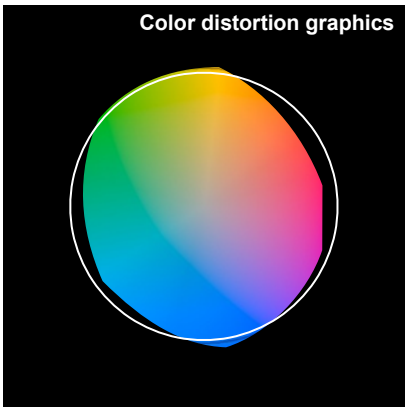

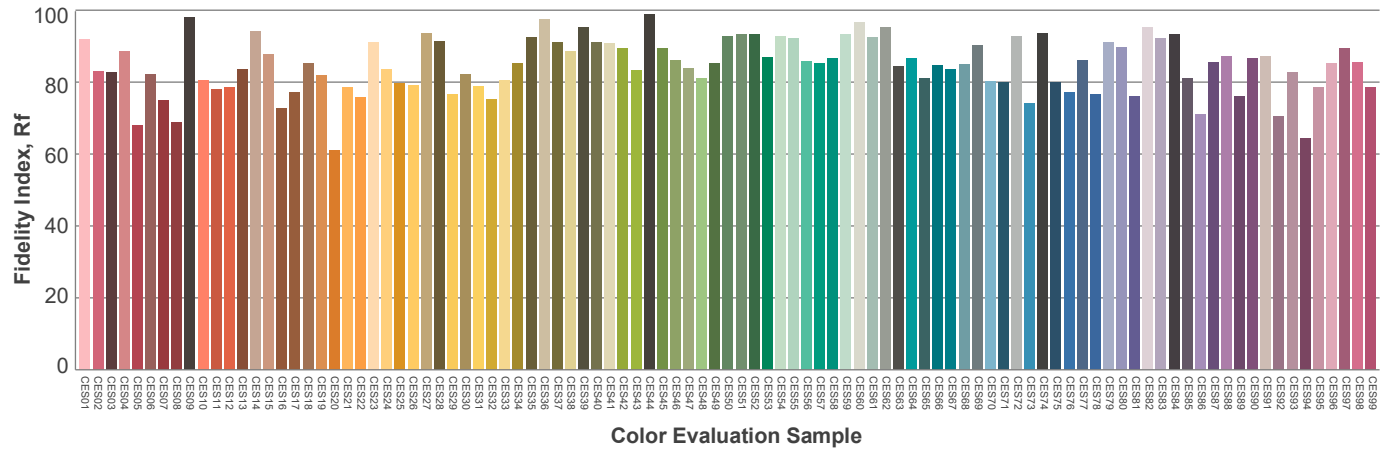

NOVA FLEX

Beam details

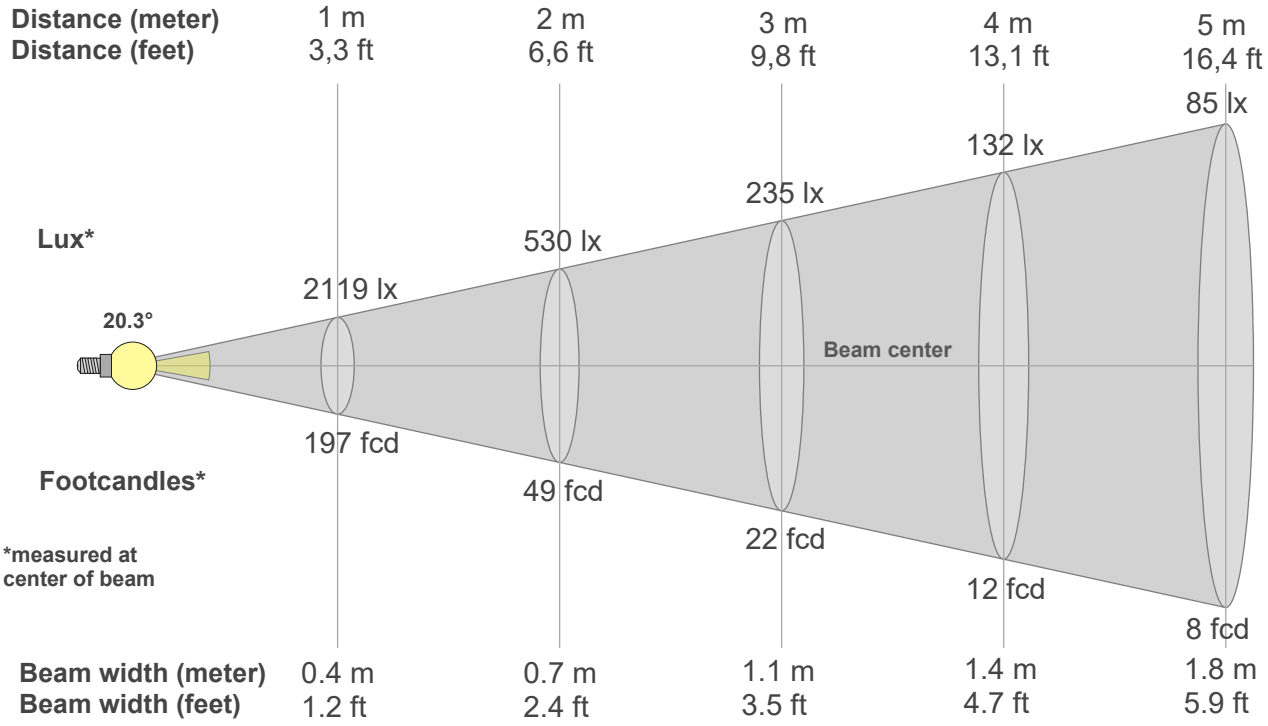

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
2119lx	530lx	235lx	132lx	85lx	59lx	43lx	33lx	26lx	21lx	18lx	15lx	13lx	11lx	9lx	8lx	7lx	7lx	6lx	5lx
196.8fc	49.2fcd	21.9fcd	12.3fcd	7.9fcd	5.5fcd	4fcd	3.1fcd	2.4fcd	2fcd	1.6fcd	1.4fcd	1.2fcd	1fcd	0.9fcd	0.8fcd	0.7fcd	0.6fcd	0.5fcd	0.5fcd

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2119	2048	1860	1609	1338	1091	890	723	592	487	403	336	280	235	196	170	144	123	106	94
100%	97%	88%	76%	63%	52%	42%	34%	28%	23%	19%	16%	13%	11%	9%	8%	7%	6%	5%	4%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2119	2040	1840	1580	1305	1064	861	678	515	375	270	180	105	63	37	16	5	3	2	2
100%	96%	87%	75%	62%	50%	41%	32%	24%	18%	13%	9%	5%	3%	2%	1%	0%	0%	0%	0%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2119	2047	1857	1602	1335	1092	890	725	594	490	404	337	283	237	201	172	145	126	110	96
100%	97%	88%	76%	63%	52%	42%	34%	28%	23%	19%	16%	13%	11%	9%	8%	7%	6%	5%	5%

Intensities in 270° c-plane


0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
2119	2044	1847	1581	1309	1064	865	707	583	480	401	338	285	242	207	180	160	141	125	111
100%	96%	87%	75%	62%	50%	41%	33%	27%	23%	19%	16%	13%	11%	10%	9%	8%	7%	6%	5%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
20.3°	51.8°	86.2°	94.9%	88.1%

NOVA FLEX

Iso Diagrams

iso-candela diagram

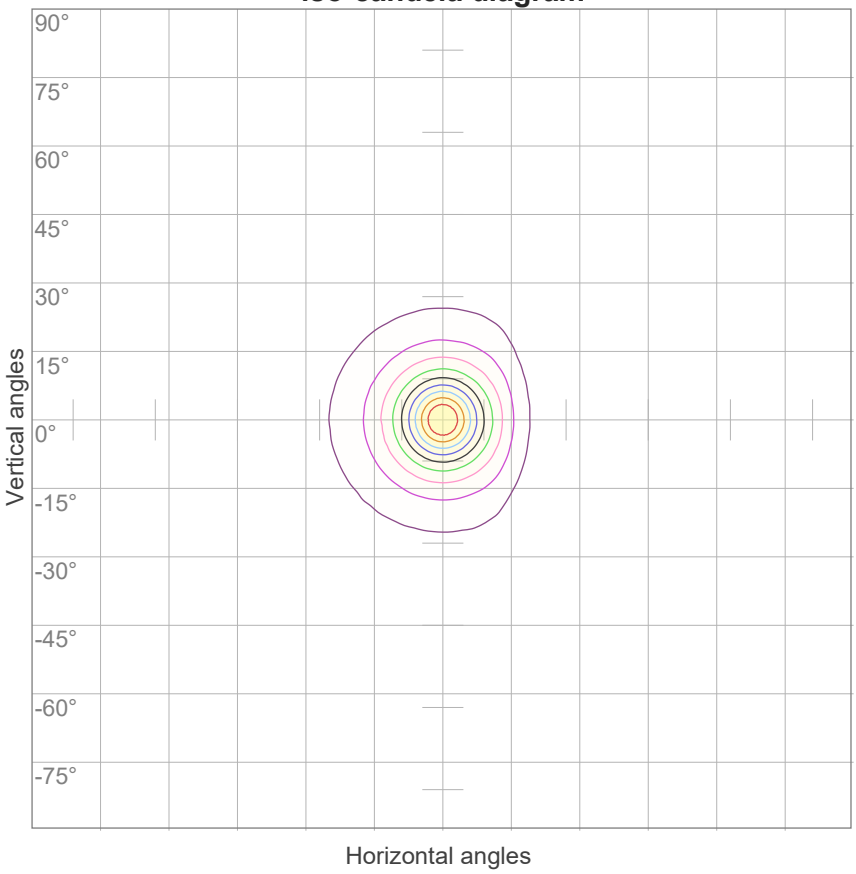


10%	212 cd
20%	424 cd
30%	636 cd
40%	848 cd
50%	1059 cd
60%	1271 cd
70%	1483 cd
80%	1695 cd
90%	1907 cd

Conditions:

Number of c-planes: 72

Candela at center: 2119 cd

iso-lux diagram

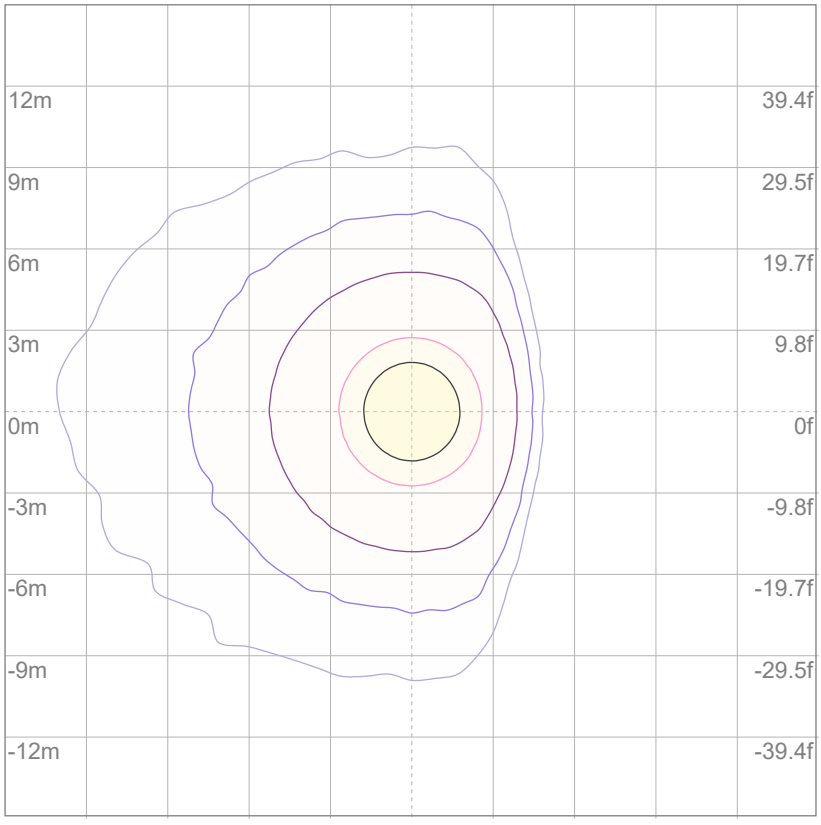

Mounting height: 10 meters (33 feet)

3%	0.636 lx
5%	1.06 lx
10%	2.12 lx
30%	6.36 lx
50%	10.6 lx

Conditions:

Number of c-planes: 72

Lux at center: 21.2 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

NOVAFLEX

p Ceiling	70	70	50	50	30	70	70	50	50	30
p Walls	50	30	50	30	30	50	30	50	30	30
p Floor	20	20	20	20	20	20	20	20	20	20
Room size X Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
Variation of the observer position for the luminaire distance S										
n/a	n/a					n/a				
n/a	n/a					n/a				
n/a	n/a					n/a				
CIE 117-1995. Corrected glare indices referring to 567 lm total luminous flux										

UGR data could not be calculated due to missing/wrong symmetry. Go to Edit -> Photometric -> Corrections and select Correct asymmetry (UGR not defined for asymmetrical distributions)..

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)				Room Values are expressed as percentage of Lumens delivered to the task surface													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	87
3	103	96	91	88	101	95	90	87	92	89	85	90	87	84	88	85	83	81
4	98	91	85	81	96	90	85	81	88	83	80	86	82	79	84	81	78	77
5	94	86	80	76	92	85	80	76	83	79	75	82	78	75	80	77	74	73
6	90	82	76	72	89	81	76	72	79	75	71	78	74	71	77	73	70	69
7	86	78	72	69	85	77	72	68	76	71	68	75	71	68	74	70	67	66
8	83	75	69	65	82	74	69	65	73	68	65	72	68	65	71	67	64	63
9	80	72	66	63	79	71	66	62	70	66	62	69	65	62	69	65	62	61
10	77	69	64	60	77	68	63	60	68	63	60	67	63	60	66	62	60	58

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
143 lm	178 lm	104 lm	55.0 lm	34.8 lm	23.2 lm	14.7 lm	9.10 lm	5.01 lm

90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0.063 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm	0.000 lm

LCS table

BUG rating:	B1 U0 G0	
Forward light	Lumens	Lumens %
Low(0-30):	212.4	37.5%
Medium(30-60):	56.6	10%
High(60-80):	11.8	2.1%
Very high(80-90):	2.6	0.5%
Back light		
Low(0-30):	212.3	37.5%
Medium(30-60):	56.3	9.9%
High(60-80):	12.1	2.1%
Very high(80-90):	2.4	0.4%
Uplight		
Low(90-100):	0	0%
High(100-180):	0	0%

