NOVA FLEX

Flexible Grazer Test Report

Light efficiency:

88 Lumen/Watt

Light quality:

CRI: 86.0

Color temperature:

4126 K

Output: 706 lm
Peak: 1891 cd

Power: 8.0 W
PF: 1.0


Tracking number: VT250723-006470

Product name:
GRZ White 25 24 40


Item number:
1 foot Flex Grazer White 4000K 25° Optic

Date and time:
7/23/25 12:10:24 PM

All values scaled to 1 foot
From 0.75 M sample tested @ 11 M

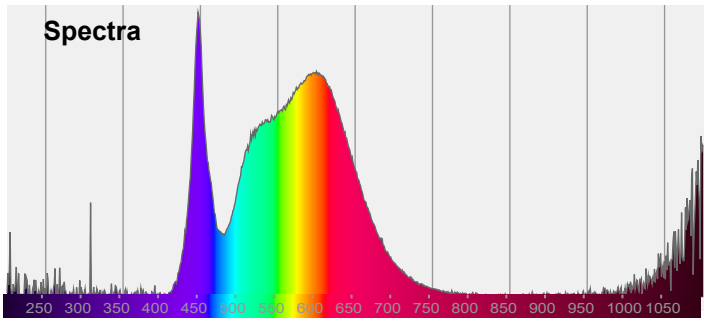


Average Beam Angle

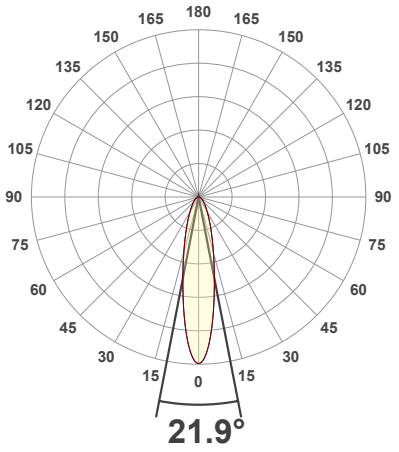


C Plane Resolution: 5°

Angular Distribution 0 ° Plane

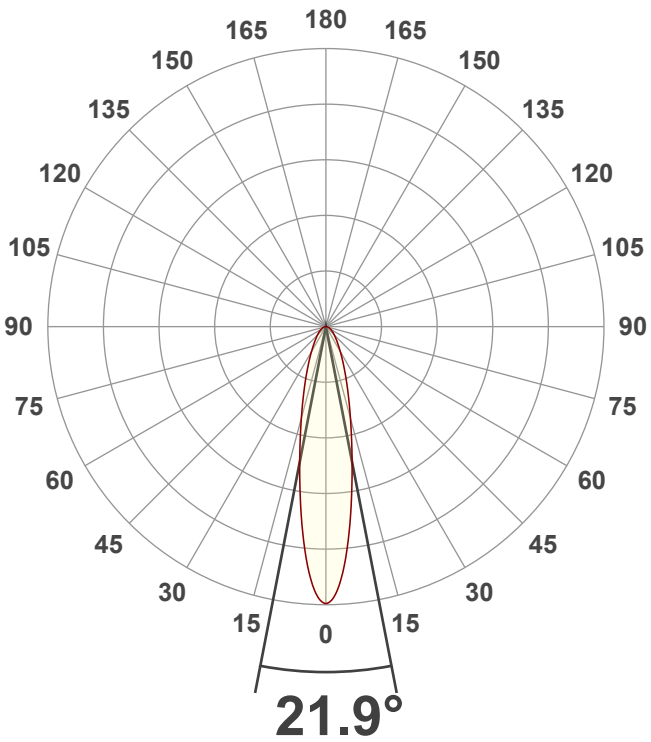


Angular Distribution 90 ° Plane

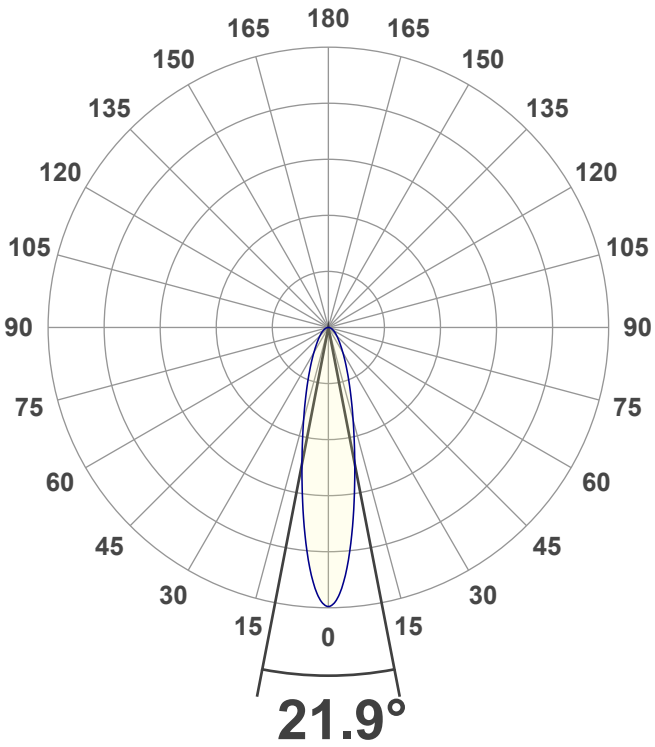


NOVA FLEX

Color details

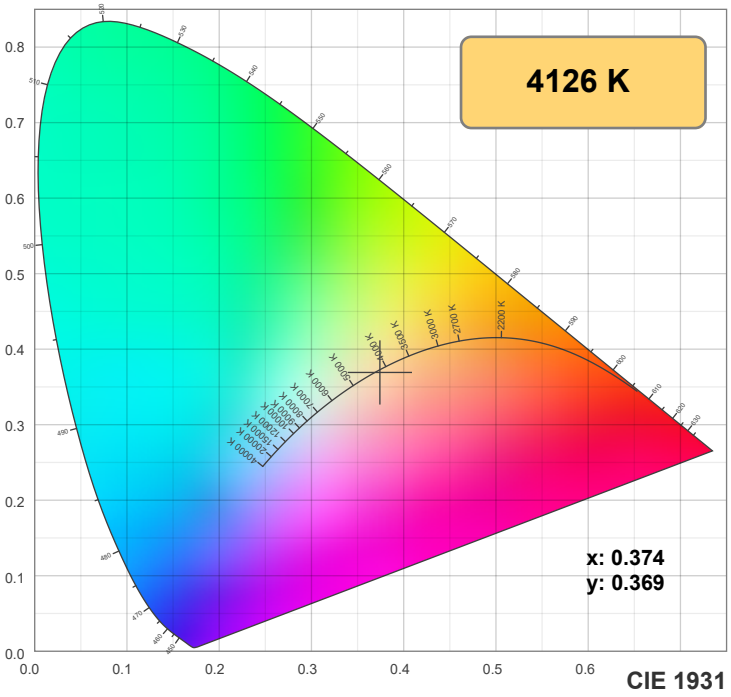


CIE 1931

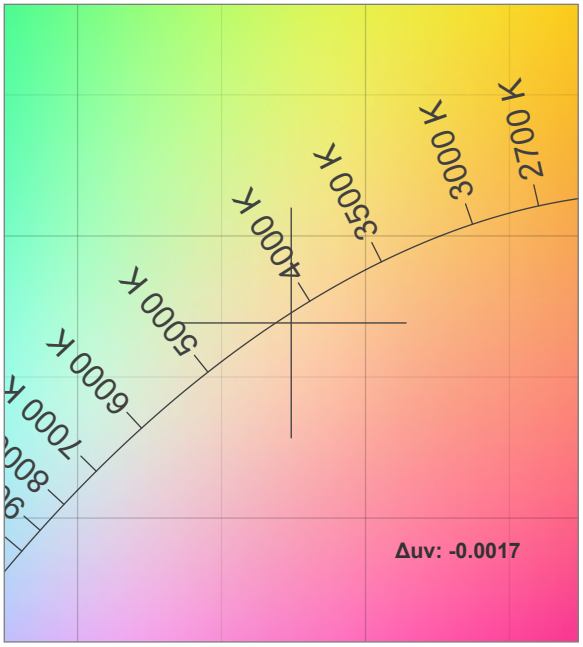


CIE 1931 ZOOM

TM-30: 85.6

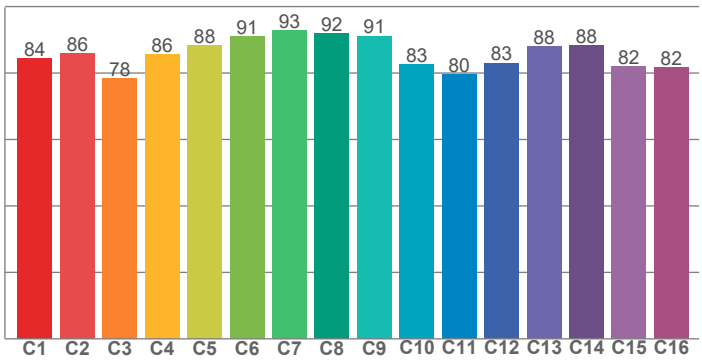

CRI: (R1-R8): 86.0

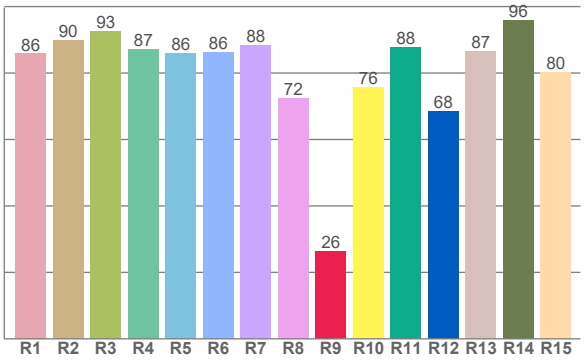

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
85.8	89.8	92.6	87.2	85.8	86.1	88.2	72.4	26.4	75.6	87.7	68.5	86.7	95.8	80.2


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
84.5	85.9	78.3	85.6	88.3	90.9	92.9	91.8	91.1	82.6	79.7	83.0	87.9	88.3	82.0	81.6

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
84.7	97.8	79.0	79.6	85.5	86.7	87.1	91.1	96.8	87.4	85.7	85.3	85.8	76.8	79.6

CQS: 84.8

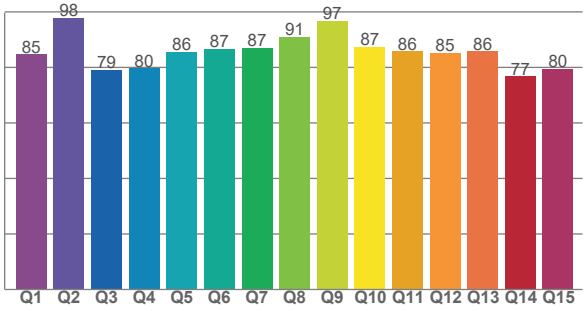

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color diviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
4126 K	86.0	26.4	85.6	99.2	84.8	0.374	0.369	0.224	0.332	-0.0017

NOVA FLEX

TM-30 details


Rf 85.6


Fidelity index Rf


Rg 99.2


Gamut index Rg


Hue Bin	R_f	Shifts (%) Chroma	Hue
1	84	-9%	-2%
2	86	-6%	5%
3	78	-3%	11%
4	86	2%	9%
5	88	5%	6%
6	91	6%	-1%
7	93	1%	-4%
8	92	-3%	-3%
9	91	-5%	1%
10	83	-7%	8%
11	80	1%	14%
12	83	5%	8%
13	88	9%	-3%
14	88	6%	-4%
15	82	2%	-13%
16	82	-3%	-12%

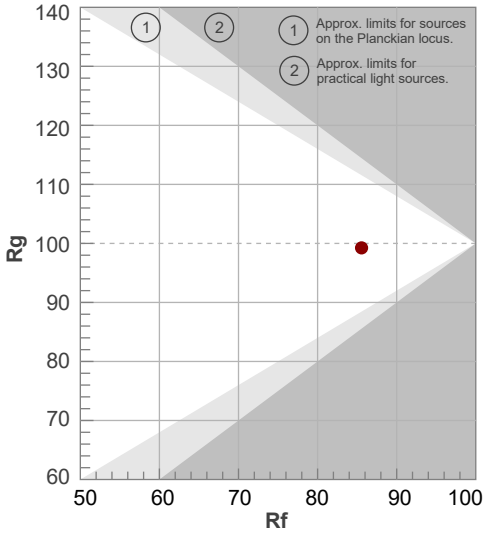


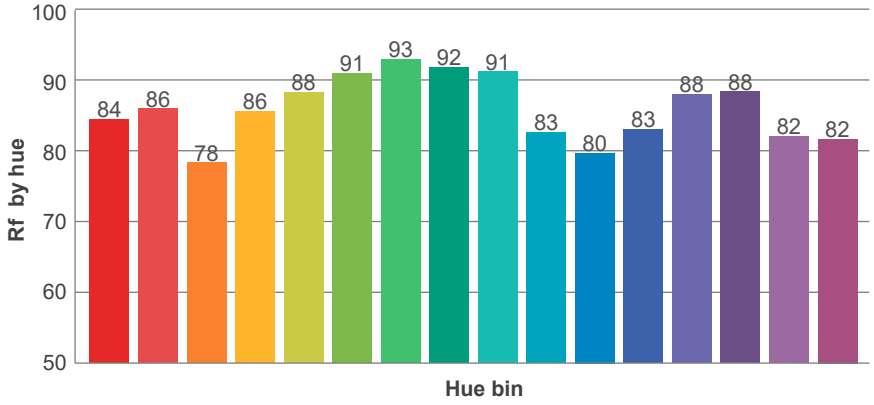

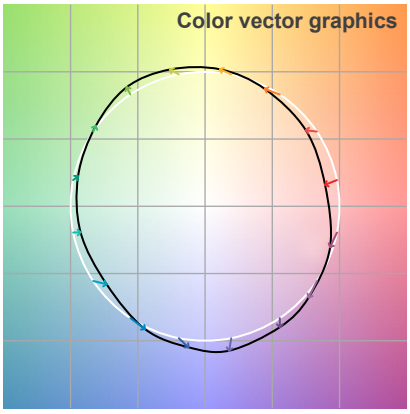

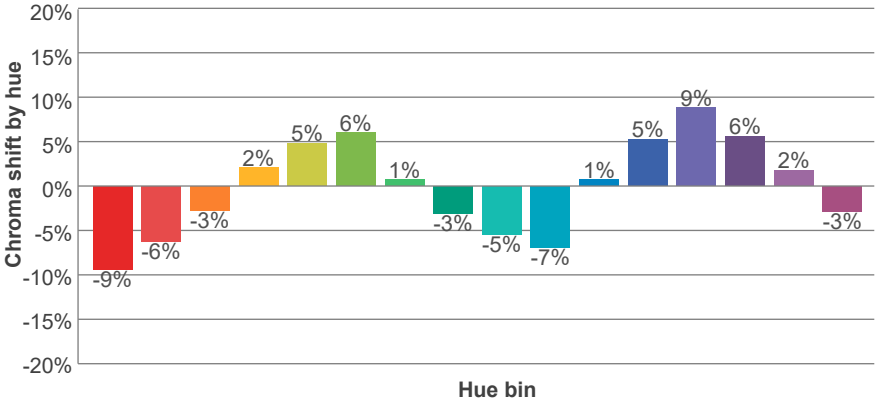


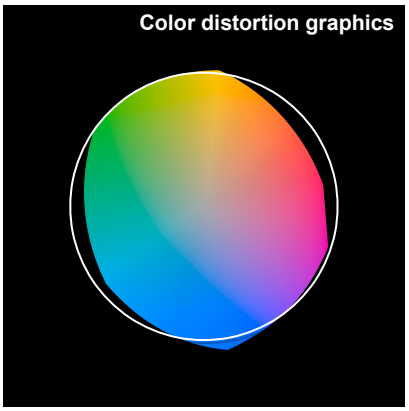

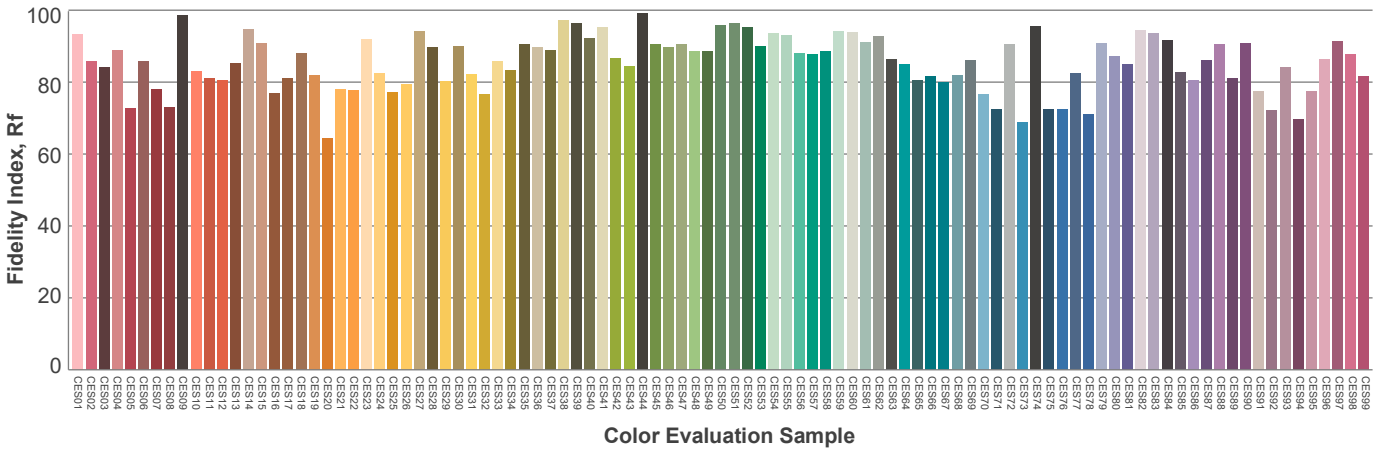

NOVA FLEX

Beam details

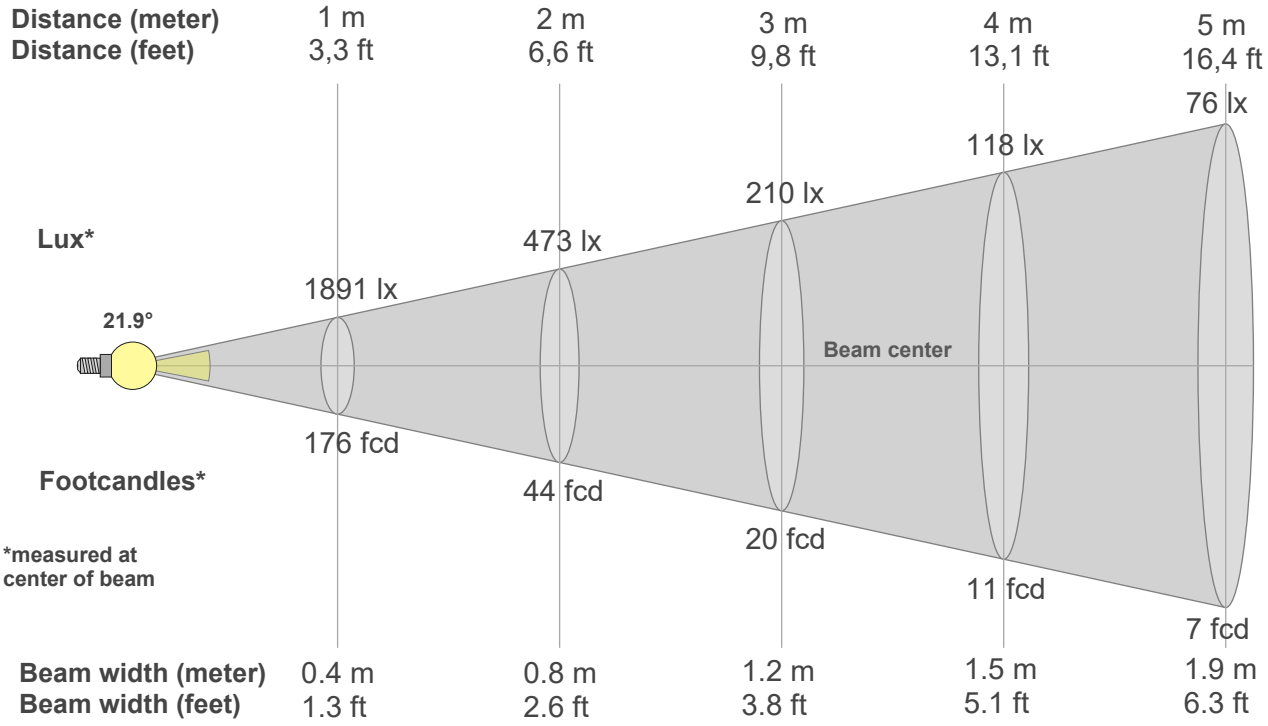

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
1891lx	473lx	210lx	118lx	76lx	53lx	39lx	30lx	23lx	19lx	16lx	13lx	11lx	10lx	8lx	7lx	7lx	6lx	5lx	5lx
175.6fc	43.9fcd	19.5fcd	11fcd	7fcd	4.9fcd	3.6fcd	2.7fcd	2.2fcd	1.8fcd	1.5fcd	1.2fcd	1fcd	0.9fcd	0.8fcd	0.7fcd	0.6fcd	0.5fcd	0.5fcd	0.4fcd

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1891	1832	1677	1465	1240	1032	856	711	594	499	421	358	305	263	227	197	172	151	134	119
100%	97%	89%	77%	66%	55%	45%	38%	31%	26%	22%	19%	16%	14%	12%	10%	9%	8%	7%	6%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1891	1832	1677	1465	1240	1032	856	711	594	499	421	358	305	263	227	197	172	151	134	119
100%	97%	89%	77%	66%	55%	45%	38%	31%	26%	22%	19%	16%	14%	12%	10%	9%	8%	7%	6%

Intensities in 180° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1891	1832	1677	1465	1240	1032	856	711	594	499	421	358	305	263	227	197	172	151	134	119
100%	97%	89%	77%	66%	55%	45%	38%	31%	26%	22%	19%	16%	14%	12%	10%	9%	8%	7%	6%

Intensities in 270° c-plane


0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
1891	1832	1677	1465	1240	1032	856	711	594	499	421	358	305	263	227	197	172	151	134	119
100%	97%	89%	77%	66%	55%	45%	38%	31%	26%	22%	19%	16%	14%	12%	10%	9%	8%	7%	6%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
21.9°	61.1°	113°	91.4%	80.8%

NOVA FLEX

Iso Diagrams

iso-candela diagram

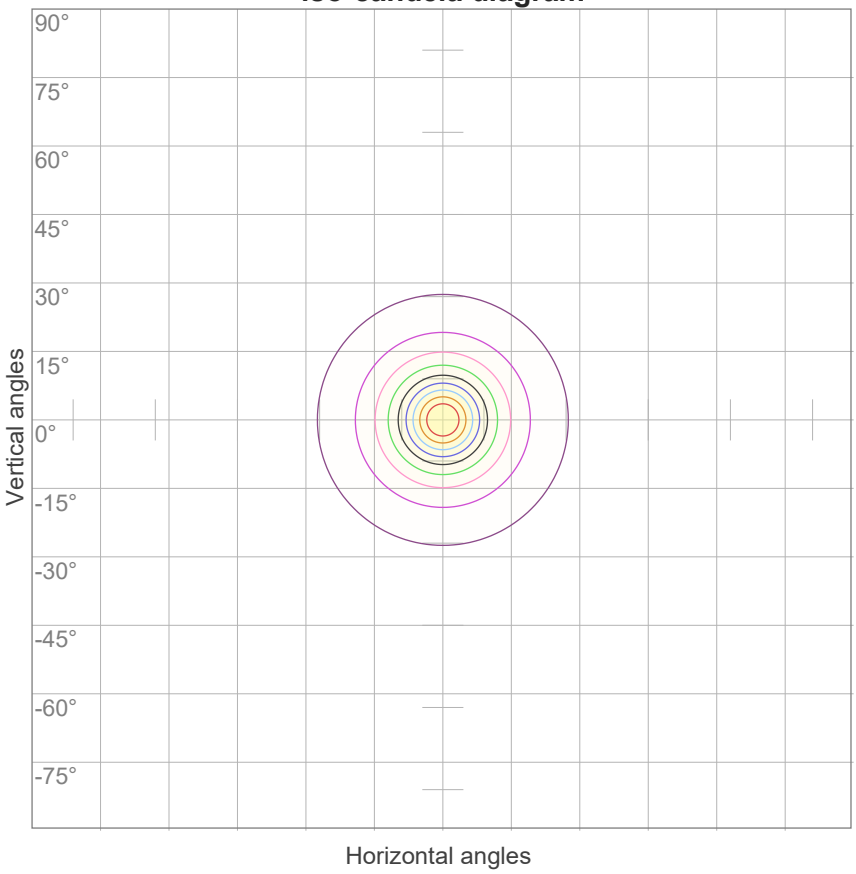


10%	189 cd
20%	378 cd
30%	567 cd
40%	756 cd
50%	945 cd
60%	1134 cd
70%	1323 cd
80%	1512 cd
90%	1702 cd

Conditions:

Number of c-planes: 72

Candela at center: 1891 cd

iso-lux diagram

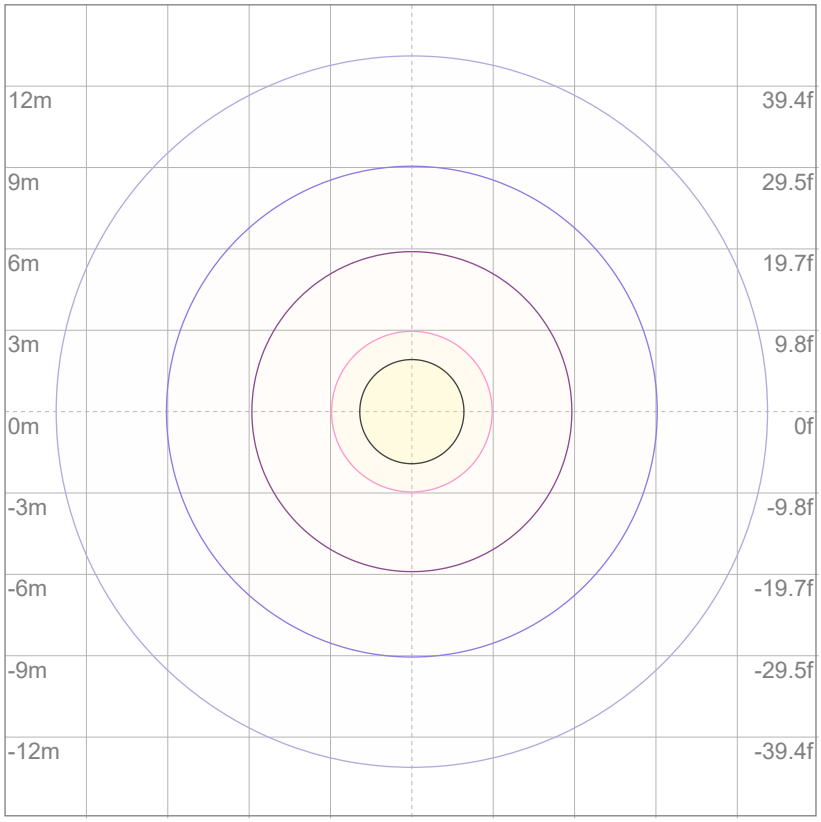

Mounting height: 10 meters (33 feet)

3%	0.567 lx
5%	0.945 lx
10%	1.89 lx
30%	5.67 lx
50%	9.45 lx

Conditions:

Number of c-planes: 72

Lux at center: 18.9 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

NOVA FLEX

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X	Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	19.1	19.9	19.3	20.1	20.3	19.8	20.6	20.0	20.8	21.0
	3H	19.8	20.7	20.2	20.9	21.1	20.7	21.5	21.0	21.8	21.9
	4H	20.1	20.9	20.5	21.2	21.4	21.1	22.0	21.5	22.2	22.4
	6H	20.4	21.1	20.7	21.4	21.8	21.6	22.3	21.9	22.6	22.9
	8H	20.5	21.1	20.8	21.5	21.9	21.7	22.4	22.1	22.7	23.1
	12H	20.5	21.2	20.8	21.5	21.9	21.9	22.5	22.2	22.9	23.3
4H	2H	19.4	20.2	19.8	20.5	20.7	20.0	20.8	20.4	21.1	21.3
	3H	20.4	21.1	20.8	21.4	21.9	21.2	21.9	21.5	22.2	22.6
	4H	20.8	21.4	21.2	21.8	22.3	21.7	22.3	22.1	22.7	23.2
	6H	21.1	21.7	21.6	22.1	22.4	22.2	22.8	22.7	23.2	23.5
	8H	21.2	21.8	21.7	22.1	22.5	22.4	23.0	22.9	23.3	23.7
	12H	21.3	21.7	21.8	22.1	22.6	22.6	23.0	23.1	23.5	23.9
8H	4H	21.0	21.5	21.5	21.9	22.3	21.8	22.4	22.3	22.7	23.1
	6H	21.4	21.8	21.9	22.3	22.8	22.4	22.8	22.9	23.3	23.8
	8H	21.6	22.0	22.1	22.5	23.1	22.7	23.1	23.3	23.6	24.2
	12H	21.7	22.0	22.3	22.5	23.1	23.0	23.3	23.6	23.8	24.4
12H	4H	20.9	21.4	21.4	21.8	22.3	21.8	22.2	22.3	22.6	23.1
	6H	21.5	21.8	22.0	22.3	23.0	22.5	22.8	23.0	23.3	24.0
	8H	21.7	22.0	22.3	22.5	23.1	22.8	23.1	23.4	23.6	24.2
Variation of the observer position for the luminaire distance S											
S = 1.0H		0.4 / -0.4					0.3 / -0.3				
S = 1.5H		0.9 / -0.8					0.8 / -0.6				
S = 2.0H		1.7 / -1.3					1.4 / -1.1				
CIE 117-1995. Corrected glare indices referring to 706 lm total luminous flux											

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)				Room Values are expressed as percentage of Lumens delivered to the task surface													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99
1	112	109	106	103	109	106	104	101	102	100	98	98	96	95	95	93	92	90
2	106	100	95	91	103	98	94	90	95	91	88	91	89	86	88	86	84	82
3	100	92	87	82	97	91	86	82	88	84	80	85	82	79	83	80	77	76
4	94	86	80	75	92	85	79	75	82	77	74	80	76	73	78	75	72	70
5	89	80	74	69	88	79	73	69	77	72	68	76	71	68	74	70	67	65
6	85	76	69	65	83	75	69	64	73	68	64	72	67	63	70	66	63	61
7	81	71	65	61	80	71	65	60	69	64	60	68	63	60	67	62	59	58
8	77	68	61	57	76	67	61	57	66	60	57	65	60	56	64	59	56	55
9	74	64	58	54	73	64	58	54	63	57	54	62	57	54	61	57	53	52
10	71	61	55	52	70	61	55	51	60	55	51	59	54	51	58	54	51	50

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
132 lm	182 lm	132 lm	89.8 lm	63.9 lm	45.4 lm	29.2 lm	17.2 lm	6.79 lm

90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
1.44 lm	1.26 lm	1.18 lm	1.07 lm	0.920 lm	0.746 lm	0.550 lm	0.337 lm	0.113 lm

LCS table

BUG rating:	B1 U0 G0	
Forward light	Lumens	Lumens %
Low(0-30):	225.3	31.9%
Medium(30-60):	100.6	14.3%
High(60-80):	23.5	3.3%
Very high(80-90):	3.4	0.5%
Back light		
Low(0-30):	225.3	31.9%
Medium(30-60):	100.6	14.3%
High(60-80):	23.5	3.3%
Very high(80-90):	3.4	0.5%
Uplight		
Low(90-100):	0	0%
High(100-180):	0	0%

