

# TUFFLITE NX

## Polycarbonate Wet Location LED Emergency Light

Tufflite NX provides an economical solution for Hostile or Wet location applications. Corrosion resistant UV stabilized ABS housing is ideal for Indoor or Outdoor wet locations and is resistant to corrosive atmospheres, non-hazardous dust environments and splashing or spraying water. Now available with matching exit signs and exitcombo unit the NX family offers a complete solution for NEMA 4X requirements.



### CONSTRUCTION

- Corrosion resistant UV stabilized 5VA rated polycarbonate in gray finish
- Sealed and gasketed housing with hinged cover
- Mounting feet for easy wall mount with side entries for conduit

### ELECTRICAL

- 120 / 277V selectable input
- LED AC present indicator and sealed external push to test switch
- Fully automatic operation provides 90 minute backup
- Maintenance free 9.6V Nickel Cadmium battery
- Solid state charging circuit recharges battery per UL924 requirements
- Low voltage cutoff prevents battery damage and ensures positive charge acceptance following an extended discharge
- Brownout sensing assures emergency operation during periods of low line voltage
- Line latch prevents unnecessary discharge of battery during installation, loads will not energize until after application of utility power
- Remote capacity of 3.7 watts is standard at 0° - 50° C
- Optional certified CEC Title 20 listing available

### ILLUMINATION

- Sealed and gasketed weather proof lampheads with chrome plates metallized reflectors and tempered glass lenses for optimal light distribution
- 1.875 watts per lamp head with 15 LED's per head parallel wired

### CERTIFICATION

- UL listed for wet locations -20° C to 50° C
- Listed to UL924
- Meets NFPA101 Life Safety Code, NFPA 70-NEC and OSHA requirements

### WARRANTY

- 3 year limited warranty- view complete warranty terms online at [www.evenlite.com/terms-warranty](http://www.evenlite.com/terms-warranty).

### ORDERING GUIDE

NXLED


MODEL	OPTIONS		ORDERING NOTES
NXLED	CEC	Title 20 Compliant	1 Dimensions: 15" x 14" x 6"
	WG5	Wire Guard <sup>1</sup>	
		<b>COMPATIBLE REMOTE HEADS</b>	
		PRWLED1MV	Single 1 Watt Outdoor Remote Head
		PRW2LEDMV	Double 1 Watt Outdoor Remote Head
NXLED			

Fill in fields from categories above and complete type and part number.

Type No:

Full Part No:

**DIMENSIONS**

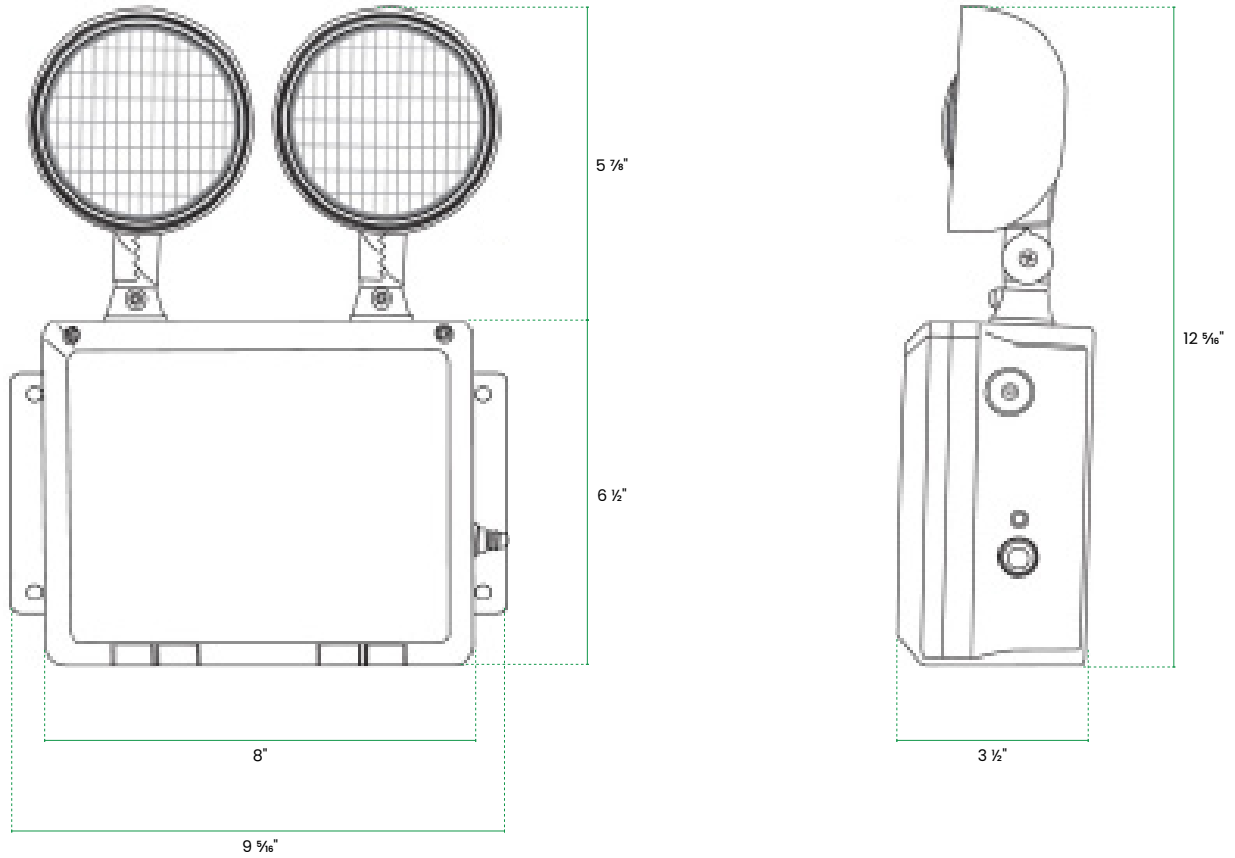

**SPACING DIAGRAM**

MOUNTING HEIGHT IS 8' REFLECTANCE OF 80-50-20

