



**BULLARD
BOLLARDS**
Think Bollard Think Bullard

**AXIS SQ 35
SPOTLIGHT**





**BULLARD
BOLLARDS**
Think Bullard Think Bullard

**CODE:
BB-AXS-SQ35-SP-GH**

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



LED

IP67



CASAMBI

GENERAL INFORMATION:

The Axis SQ 35 Spotlight is a compact, precision-engineered outdoor luminaire designed for discreet yet highly controlled accent lighting. Featuring a minimalist square housing crafted from corrosion-resistant stainless steel and extruded aluminum, it delivers exceptional durability with an IP67 rating for year-round exterior use. The fixture offers adjustable aiming with swivel and rotation, multiple beam angles for narrow to medium flood distributions, and high-performance LED optics with excellent color rendering, making it ideal for highlighting architectural details, landscape features, walls, trees, and pathways. With flexible mounting options, a wide range of finishes, and compatibility with modern dimming and control systems, the Axis SQ 35 combines refined aesthetics with professional-grade performance.

FIXTURE TYPE:

Spot Lights

LIGHTING:

LED

GASKETS:

Silicone gaskets

APPLICATION FIELD:

Series of spot lights to be mounted on floor, wall, spike, tree with belt system or on a pole system.

VOLTAGE:

110-277V



MATERIAL:

Stainless steel AISI 316L

Extruded aluminum EN AW-6063 T5 high resistance to oxidation

EXTERNAL SCREWS:

Stainless steel A4-70 treated with highly antioxidant water-repellent lubricating solution

DIFFUSER MATERIAL:

Tempered glass 4mm

IP RATING:

IP 67

IP67

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA



**BULLARD
BOLLARDS**
Think Bollard Think Bullard

**CODE:
BB-AXS-SQ35-SP-GH**

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



LED

IP67



CASAMBI

APPLINCE CLASS:

|||

DRIVER POSITION:

Remote

CRI:

>90

CONTROL GEAR TYPE:

Electronic

CABLE ENTRY:

Brass cable gland M12 Ø 3.5/7 mm

CORD LENGTH:

0.5m

SWIVEL:

+/- 90°

LIGHT DISTRIBUTION:

13° - (<=15°)

25° - (15° - 45°)

46° - Symmetrical medium flood (45° - 125°)

BEAM DIRECTIONABILITY:

Adjustable

OPTICS:

Anti UV technopolymer lens

WARRANTY:

LED lighting products are warranted for 5 years.

MAIN FEATURES:

High visual comfort / Wide range of finishes / Functional design

Minimal design / Shock resistant

Operating Temperature: -22°F~122°F

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA




**BULLARD
BOLLARDS**
Think Bollard Think Bullard

**CODE:
BB-AXS-SQ35-SP-GH**

FIXTURE TYPE: _____

PROJECT NAME: _____

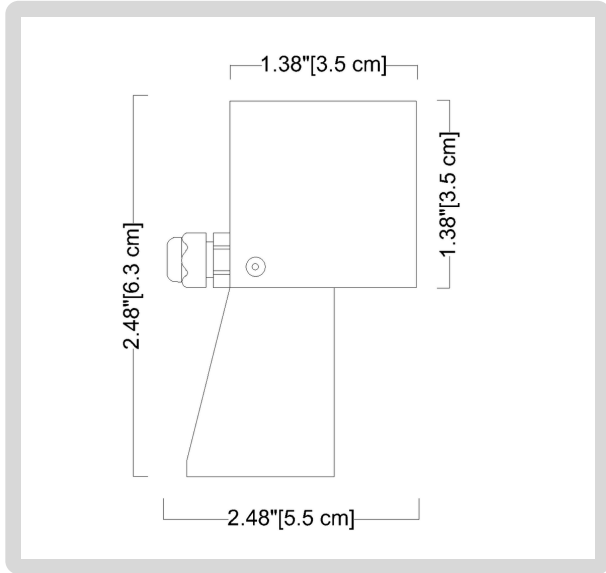

HOW TO ORDER:

CODE:

Example:
CODE: BB-AXS-SQ35-SP-GH-L1-B2-DIM
-700-19-AC205-IP66

BB-AXS-SQ35-SP-
GH-L1-B2-DIM
-700-19-AC205-
IP66

1 DIMENSIONS:

- A) Diameter - Ø: 1.38" (3.5 cm)
B) Length - L: 1.50" (3.8 cm)
C) Height - H: 2.28" (5.8 cm)

2 LIGHT SOURCE:

- L1** LED / 1 x 2.1 W / 3000K / 196 lm
-L2 LED / 1 x 2.1 W / 4000K / 218 lm

3 BEAM ANGLE:

- B1** 13°
-B2 25°
-B3 46°

4 DIMMING OPTIONS:

- NON** NON-Dimmable
-DIM 0-10V
-CAS Casambi
-DAL Dali

5 CONTROL GEAR / OPERATION RANGE:

- 24V** 24 V DC
-700 700 mA

6 FINISH OPTIONS:

- 01** White matt
-02 Black matt
-05 Anthracite grey matt
-19 Light grey matt
-26 Bronze
-45 Corten matt
-62 Antique grey matt
-65 Blue matt
-80 Sand matt
-83 Green matt

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA



**BULLARD
BOLLARDS**
Think Bullard Think Bullard

**CODE:
BB-AXS-SQ35-SP-GH**

FIXTURE TYPE: _____

PROJECT NAME: _____

HOW TO ORDER:

CODE:

**Example:
CODE: BB-AXS-SQ35-SP-GH-L1-B2-DIM
-700-19-AC205-IP66**

BB-AXS-SQ35-SP-
GH-L1-B2-DIM
-700-19-AC205-
IP66

7

ACCESSORIES:

-AC204

IP 68 fast connector 4P



-AC205-IP66

IP66 remote power supply box



-AC203

Stake 170mm



-AC9000.CDXXXXXES FOR (24V DC MODEL)

Power Hub 6 x 24V Casambi



-AC9000.CDXXXXXEN FOR (24V DC MODEL)

Power Hub 6 x 24V noDim



-AC9000.CDXXXXXED FOR (24V DC MODEL)

Power Hub 6 x 24V Dim



THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

Updated 05/02/2026



FIXTURE TYPE: _____

PROJECT NAME: _____

HOW TO ORDER:


CODE:

**Example:
CODE: BB-AXS-SQ35-SP-GH-L1-B2-DIM
-700-19-AC205-IP66**

BB-AXS-SQ35-SP-
GH-L1-B2-DIM
-700-19-AC205-
IP66


PHOTOMETRY:

13° / 3000K

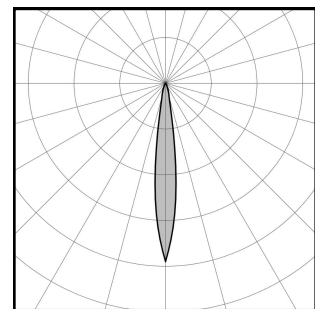


H(m)	φ (m)	lux med. 3000 K	lux max. 3000 K
5	1.2	47	76
4	0.9	74	119
3	0.7	132	212
2	0.5	297	478
1	0.2	1187	1910

13° / 4000K

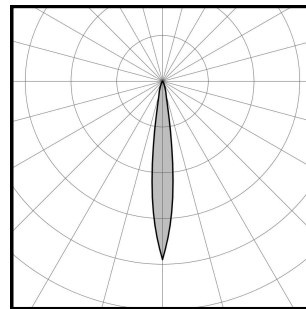


H(m)	φ (m)	lux med. 4000 K	lux max. 4000 K
5	1.2	53	85
4	0.9	83	133
3	0.7	147	236
2	0.5	330	531
1	0.2	1320	2124

25° / 3000K

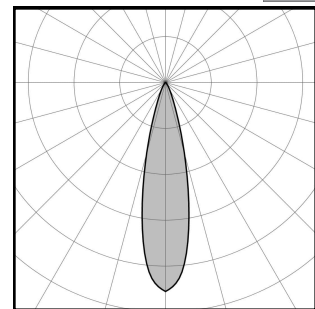


H(m)	φ (m)	lux med. 3000 K	lux max. 3000 K
5	2.2	18	29
4	1.8	28	45
3	1.3	50	79
2	0.9	113	178
1	0.4	451	714

25° / 4000K

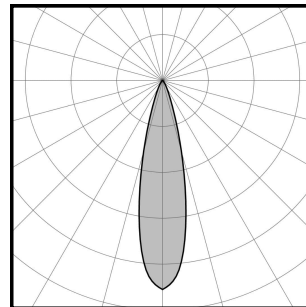


H(m)	φ (m)	lux med. 4000 K	lux max. 4000 K
5	2.2	20	32
4	1.8	31	50
3	1.3	56	88
2	0.9	125	199
1	0.4	502	794

46° / 3000K

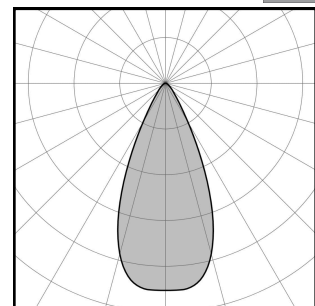

H(m)	φ (m)	lux med. 3000 K	lux max. 3000 K
5	4.3	5	9
4	3.4	8	14
3	2.6	15	25
2	1.7	33	55
1	0.9	133	222

46° / 4000K

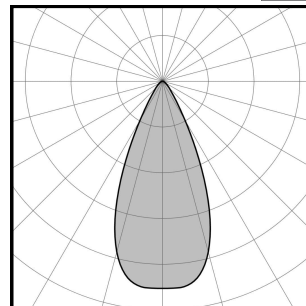

H(m)	φ (m)	lux med. 4000 K	lux max. 4000 K
5	4.3	6	10
4	3.4	9	15
3	2.6	16	27
2	1.7	37	62
1	0.9	148	247

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA