



**BULLARD
BOLLARDS**
Think Bollard Think Bullard

MAXI BUNNY LINE 300 (INGROUND LUMINAIRES)







**BULLARD
BOLLARDS**
Think Bullard Think Bullard

CODE:
BB-001545.BRMTTUNEL-GH

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

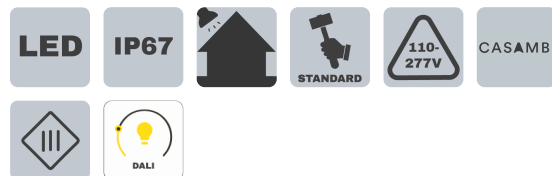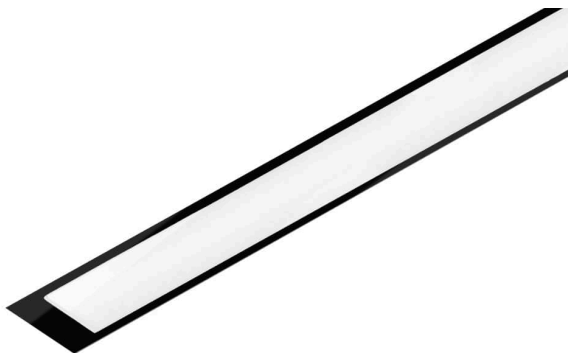

GENERAL INFORMATION:

The Maxi Bunny Line 300 is a compact linear inground LED luminaire designed for precise architectural and accent lighting in demanding outdoor environments. Constructed from extruded aluminum EN AW-6060 T5 with die-cast aluminum components and protected by an 8 mm tempered glass diffuser, it ensures excellent resistance to oxidation and durability, supported by an IP67 rating. Available with multiple beam angles—including narrow, medium, wide, asymmetric, and wall-washer distributions—it provides controlled and uniform illumination for façades, pathways, and structural details. Operating on 24V DC with a remote driver configuration and offering dimming options such as Non-dimmable, 0–10V, Casambi, and DALI, the Maxi Bunny Line 300 combines high visual comfort, minimalist design, and reliable long-term performance, backed by a 5-year warranty.

LIGHTING:

LED

LED

VOLTAGE:

110-277V



GASKETS:

Silicone gaskets

FIXTURE TYPE:

Inground Luminaires

MATERIAL:

Extruded aluminum EN AW-6060 T5 high resistance to oxidation,
Die-cast aluminum EN AB 44100 highly resistant to oxidation

EXTERNAL SCREWS:

Stainless steel A4-70 treated with highly antioxidant water-repellent
lubricating solution

DIFFUSER MATERIAL:

Tempered glass 8mm

IP RATING:

IP 67

IP67

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA





**BULLARD
BOLLARDS**
Think Bollard Think Bullard

CODE:
BB-001545.BRMTTUNEL-GH

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

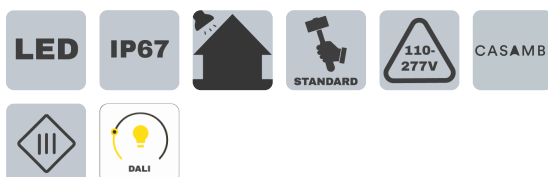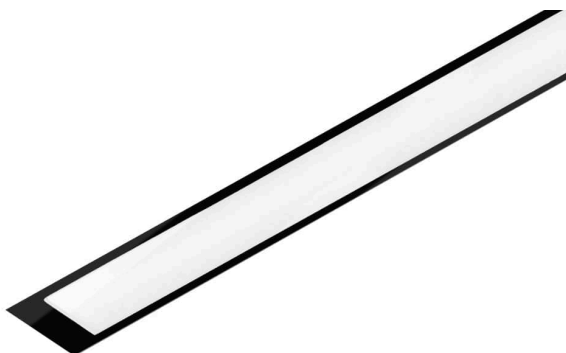

APPLINCE CLASS:

|||

OPERATION RANGE:

24 V DC

DRIVER POSITION:

Remote

CRI:

>90

CABLE ENTRY / CABLE TYPE:

Brass cable gland M12 Ø 3.5/7 mm / FR5FOEM7-AD8 2x0.5mm²

CORD LENGTH:

0.5m

LIGHT DISTRIBUTION:

12° - Symmetrical narrow beam ($\leq 15^\circ$)
25° - Symmetrical medium flood ($15^\circ - 45^\circ$)
50° - Symmetrical wide beam ($45^\circ - 125^\circ$)
14° x 47° - 2 Axis symmetrical
78° x 47° - Asymmetric flood (wall washer)
69° x 139° - 2 Axis symmetrical

BEAM DIRECTIONABILITY:

Fixed optics

OPTICS:

Anti UV technopolymer lens

WARRANTY:

LED lighting products are warranted for 5 years.

MAIN FEATURES:

High visual comfort / Wide range of finishes
Functional design / Minimal design
Shock resistant / Operating Temperature: $-22^\circ\text{F} \sim 122^\circ\text{F}$

FINISH OPTIONS:

Glass

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA




**BULLARD
BOLLARDS**
Think Bullard Think Bullard

CODE:
BB-001545.BRMTTUNEL-GH

FIXTURE TYPE: _____

PROJECT NAME: _____

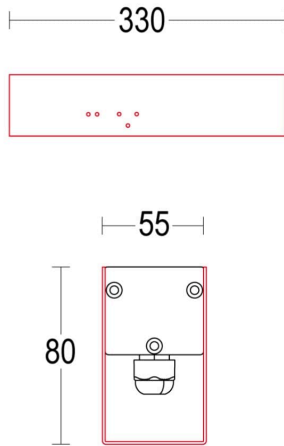

LED

IP67



CASAMBI



HOW TO ORDER:

CODE:

Example:
CODE: BB-001545.BRMTTUNEL-GH-B12-2-DIM
-AC205-IP66

BB-001545.BRMTTUNEL-GH-B12-2-DIM
-AC205-IP66

1 MODELS:

- A) Recessed depth - Ø: 3.15" (8 cm)
B) Length - L: 12.99" (33 cm)
C) Width - W: 2.17" (5.5 cm)

2 LIGHT SOURCE:

CODE	BEAM ANGLE	WATTAGE	KELVINS	LUMENS	
-B12-1	12°	1 x 12.6W	3000K	1 x 1176 lm	24 V DC
-B12-2		1 x 9W	3000K	1 x 876 lm	24 V DC
-B12-3		1 x 12.6W	4000K	1 x 1308 lm	24 V DC
-B25-1	25°	1 x 13.3W	2700-6500K	1 x 1373lm	24 V DC
-B25-2		1 x 12.6W	3000K	1 x 1176 lm	24 V DC
-B25-3		1 x 9W	3000K	1 x 876 lm	24 V DC
-B25-4		1 x 12.6W	4000K	1 x 1308 lm	24 V DC
-B50-1	50°	1 x 12.6W	3000K	1 x 1176 lm	24 V DC
-B50-2		1 x 9W	3000K	1 x 876 lm	24 V DC
-B14-47-1	14° x 47°	1 x 12.6W	3000K	1 x 1176 lm	24 V DC
-B14-47-2		1 x 9W	3000K	1 x 876 lm	24 V DC
-B78-47-1	78° x 47°	1 x 12.6W	3000K	1 x 1176 lm	24 V DC
-B78-47-2		1 x 9W	3000K	1 x 876 lm	24 V DC
-B69-139-1	69° x 139°	1 x 3.63W	3000K	1 x 433 lm	24 V DC
-B69-139-2		1 x 6W	3000K	1 x 642 lm	24 V DC

3 DIMMING OPTIONS:

- NON NON-Dimmable
-DIM 0-10V
-CAS Casambi
-DAL Dali

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA




**BULLARD
BOLLARDS**
Think Bullard Think Bullard

**CODE:
BB-001545.BRMTTUNEL-GH**

FIXTURE TYPE: _____

PROJECT NAME: _____

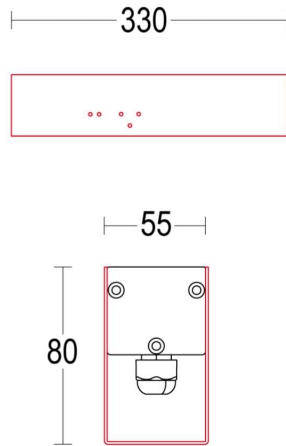

LED

IP67



CASAMBI



HOW TO ORDER:

CODE:

Example:
CODE: BB-001545.BRMTTUNEL-GH-B12-2-DIM
-AC205-IP66

BB-001545.BRMTT
UNEL-GH-B12-2-
DIM
-AC205-IP66

4

ACCESSORIES:

-AC204

IP 68 fast connector 4P



-AC205-IP66

IP66 remote power supply box



-AC279

IP 68 connector for through wiring 4P




-AC433

Rough-in housing 330mm



-AC551

Extraction tool Traccia



-AC535

Anti glare louver 300mm



(FOR 12° / 25° / 50° /
69° x 139° / 14° x 47°)

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

Updated 02/18/2026