



**BULLARD  
BOLLARDS**  
Think Bollard Think Bullard

## FLUXA 115 EXTENSION (SPOTLIGHT)





**BULLARD  
BOLLARDS**  
Think Bullard Think Bullard

**CODE:**  
**BB-FLX115EXTNTN-GH-SP**

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

NOTES:



#### GENERAL INFORMATION:

The Bullard Bollards FLUXA 115 E-Tension (BB-FLX115EXTNTN-GH-SP) is a sophisticated tension-mounted architectural luminaire that delivers beautifully balanced illumination with precise optical control and exceptional visual comfort. Its sleek, refined profile and premium finish seamlessly integrate into contemporary interior environments, elevating spatial character without distraction. Advanced LED performance and high color rendering create pure, nuanced light that enhances surfaces and materials with subtle elegance. Designed for visionary architectural projects, this fixture harmonizes minimalist aesthetics with professional-grade performance to transform spaces with understated illumination.

#### FIXTURE TYPE:

Spot Lights

#### LIGHTING:

LED

#### INPUT VOLTAGE:

110-277V

#### MATERIAL:

Die-cast aluminum EN AB 44100 highly resistant to oxidation

#### FINISH AND PROTECTION:

Primary treatment with nanoceramic conversion. Protection with textured polyester powder coating resistant to weathering and UV rays

#### IP RATING:

IP65

#### DRIVER POSITION:

Integral

#### APPLINCE CLASS:

I

#### CRI:

>90

#### ROTATION:

350°



**THINK BOLLARD - THINK BULLARD**

[sales@gordonbullard.com](mailto:sales@gordonbullard.com)

[www.bullardbollards.com](http://www.bullardbollards.com)

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA





**BULLARD  
BOLLARDS**  
Think Bullard Think Bullard

**CODE:**  
**BB-FLX115EXTNTN-GH-SP**

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

NOTES:



#### CABLE TYPE:

H07RN8-F 0.03 cm<sup>2</sup>

#### CABLE ENTRY:

Brass cable gland PG 13,5 Ø 0.6/1.2 cm

#### GASKETS:

Silicone gaskets

#### SWIVEL:

+/- 90°

#### LIGHT DISTRIBUTION:

24° Symmetrical medium flood (15 ° - 45 °)

40° Symmetrical medium flood (15 ° - 45 °)

58° Symmetrical wide beam (45 ° - 125 °)

#### BEAM DIRECTIONABILITY:

Adjustable

#### OPTICS:

Reflector in anti-UV technopolymer with super pure aluminum metallization

#### EXTERNAL SCREWS:

Stainless steel A4-70 treated with highly antioxidant water-repellent lubricating solution

#### DIFFUSER MATERIAL:

Tempered glass 0.4cm

#### WARRANTY:

LED lighting products are warranted for 5 years.

#### MAIN FEATURES:

Wide range of finishes

Functional design

Ease of aiming

Optical precision

Operating Temperature: -4°F to +122°F



**THINK BOLLARD - THINK BULLARD**

[sales@gordonbullard.com](mailto:sales@gordonbullard.com)

[www.bullardbollards.com](http://www.bullardbollards.com)

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA




**BULLARD  
BOLLARDS**  
Think Bollard Think Bullard

**CODE:  
BB-FLX115EXTNTN-GH-SP**

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

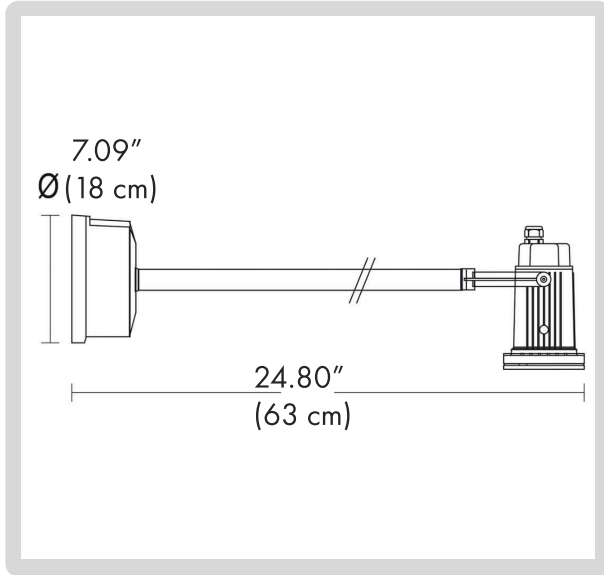

## HOW TO ORDER:

## CODE:

**Example:**  
**CODE: BB-FLX115EXTNTN-GH-SP-K40**  
**-B2-DIM-02-AC230-AC711-AC757**

BB-FLX115EXTNTN-GH  
-SP-K40-B2-DIM  
-02-AC230-  
AC711-AC757

### 1 DIMENSIONS:

Length - L: 24.80" (63 cm)  
Height - H: 10.75" (27.3 cm)

### 2 LIGHT SOURCE:

LED / 1 x 23.7 W / 110-277 V / 60 Hz

### 3 CCT&LUMENS:

**-K30** 3000K = 3306 lm  
**-K40** 4000K = 3555 lm

### 4 BEAM ANGLE:

**-B1** 24°  
**-B2** 40°  
**-B3** 58°

### 5 DIMMING OPTIONS:

**-NON** NON-Dimmable  
**-DIM** 0-10V  
**-CAS** Casambi  
**-LT** Lutron  
**-DAL** Dali

### 6 FINISH OPTIONS:

<b>-01</b> White matt	<b>-45</b> Corten matt
<b>-02</b> Black matt	<b>-62</b> Antique grey matt
<b>-05</b> Anthracite grey matt	<b>-65</b> Blue matt
<b>-19</b> Light grey matt	<b>-80</b> Sand matt
<b>-26</b> Bronze	<b>-83</b> Green matt



**THINK BOLLARD - THINK BULLARD**

sales@gordonbullard.com  
www.bullardbollards.com  
1-877-964-4646



991 South Gull Lake Dr  
Richland, MI 49083  
USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

©2026 All Rights Reserved

Updated 02/02/2026



**BULLARD  
BOLLARDS**  
Think Bollard Think Bullard

**CODE:  
BB-FLX115EXTNTN-GH-SP**

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

**HOW TO ORDER:**

**CODE:**

**Example:**  
**CODE: BB-FLX115EXTNTN-GH-SP-K40**  
**-B2-DIM-02-AC230-AC711-AC757**

BB-FLX115EXTNTN-GH-  
SP-K40-B2-DIM  
-02-AC230-  
AC711-AC757

**7**

## ACCESSORIES:

**-ED-25**

DALI Optional



**-AC230**

Polyester fixing strap with buckle (300 cm)



**-AC711**

Stake 22.0cm



**-AC757**

Hood Mikko



**8**

## PHOTOMETRY:



**24° / 3000K / 3306 lm**

	H(m)	φ (m)	lux med. 3000 K	lux max. 3000 K
5	2.1	243	382	
4	1.7	380	596	
3	1.2	675	1060	
2	0.8	1519	2385	
1	0.4	6075	9538	



**40° / 3000K / 3306 lm**

	H(m)	φ (m)	lux med. 3000 K	lux max. 3000 K
5	3.5	110	189	
4	2.8	171	295	
3	2.1	304	524	
2	1.4	685	1178	
1	0.7	2738	4713	



**58° / 3000K / 3306 lm**

	H(m)	φ (m)	lux med. 3000 K	lux max. 3000 K
5	5.6	60	118	
4	4.5	94	185	
3	3.3	168	328	
2	2.2	377	739	
1	1.1	1509	2956	



**24° / 4000K / 3555 lm**

	H(m)	φ (m)	lux med. 4000 K	lux max. 4000 K
5	2.1	247	387	
4	1.7	385	605	
3	1.2	685	1076	
2	0.8	1542	2421	
1	0.4	6167	9683	



**40° / 4000K / 3555 lm**

	H(m)	φ (m)	lux med. 4000 K	lux max. 4000 K
5	3.5	111	191	
4	2.8	174	299	
3	2.1	309	532	
2	1.4	695	1196	
1	0.7	2780	4785	



**58° / 4000K / 3555 lm**

	H(m)	φ (m)	lux med. 4000 K	lux max. 4000 K
5	5.6	61	120	
4	4.5	96	188	
3	3.3	170	333	
2	2.2	383	750	
1	1.1	1532	3001	

**THINK BOLLARD - THINK BULLARD**

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA