

FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency integral reflector combined with an opal lens insert provides excellent lighting distribution.
- ✓ Available with Spot 25°, Flood 45° and Wide Flood 60° beam angles.
- ✓ Aluminum body of the luminaire comes with a built-in-driver.
- ✓ Suitable for surface mounted and suspended installations.
- ✓ LED spot is rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED PIPE+ — — — — — — — — —

Enter the Product Code into the boxes above.

SIZE

- ☐ 11in
- ☐ 22in
- ☐ 33in

SOURCE

- ☐ 10W
- ☐ 15W
- ☐ 20W

RADIANCE

- ☐ DD - Direct

VOLTAGE

- ☐ UNV - 120/277V

DRIVER

- ☐ ST - On/Off
 - ☐ DL - 0-10V Dim (1%)
 - ☐ DA4 - DALI D4i
 - ☐
- Specify dimming protocol.

MOUNTING

- ☐ S6B - 6ft Cord BK ¹
- ☐ S6W - 6ft Cord WH ¹
- ☐ S ft ²
- ☐ SF - Surface Mount

1. Canopy match the Cord color.
2. Specify Suspension length.

BEAM

- ☐ BS - Spot 25°
- ☐ BF - Flood 45°
- ☐ BW - Wide 60°

FINISH

- ☐ BK - Black ¹
- ☐ WH - White ²
- ☐ CF/RAL

1. RAL 9005
2. RAL 9003
Specify required RAL number.

CCT

- ☐ 30K - 3000 Kelvin/90CRI
- ☐ 35K - 3500 Kelvin/90CRI
- ☐ 40K - 4000 Kelvin/90CRI
- ☐


Specify required CCT.

DIMENSIONS:

Width		Canopy
4.0"		5.0"
Height		
h1	h2	h3
11.0"	22.0"	33.0"

LUMEN OUTPUT:

Watts	30K	35K	40K
10W	930lm	950lm	990lm
15W	1395lm	1425lm	1475lm
20W	1860lm	1900lm	1940lm

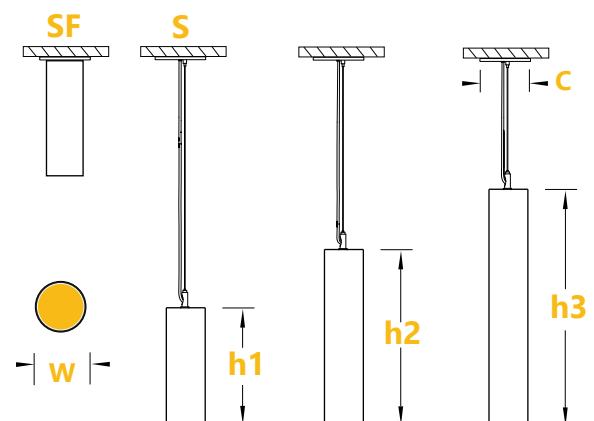

Project:

Type: