

ICON R3™

Icon Series Round Downlight 3"

Field
Selectable

or

Dim
to Warm**TRIM FINISH**

See Page 3 for All Available Trim Types



White Trimless



White Trim



Black Trimless



Black Trim



White Slope Trim



Black Slope Trim

APPLICATIONS

Residential, Commercial, Multi-Family

FEATURES**Construction**

- Aluminum Housing

Finish- White Trim
- Black Trim [Option]**Electrical & Technical**

- Input Voltage: 120VAC
120-277VAC [Option]
- Input Frequency: 60Hz
- Projected Life: L70 > 50,000 hrs
- PF: >0.9
- CRI: >90
- THD: <20%
- CCT Selectable: 2700K/3000K/3500K/
4000K/5000K
- Dim to Warm: 3000K-1800K [Option]
[Available Only For 15W]
- Operating Temp.: -4°F ~ 104°F
- Wet Location Rated
- IC Rated/Airtight Rated
- 25W Emergency Battery Backup [Option]

Optical- White PC Lens
- Available Beam Angles:

24° Narrow



38° Medium



60° Wide

Installation/Mounting

- Spring Clip Mount [W/Trim]:
Ceiling Cutout:
• Ø3 3/8" [10W]
• Ø3 1/2" [15W]
- Flush to Ceiling [Trimless]:
Ceiling Cutout: Ø3 9/16"

Compliance

- JA8 TITLE 24 Compliant

Controls

- Triac Dimming [120V]
- Dual Mode:
0-10V Dimming [120-277V] [Dims to 1%] +
Triac Dimming [120V]

Dimmer Compatibility List:

- See Page 4

Lumen Output

- See Page 3

Warranty

- 5 Year Warranty
- See warranty documentation for more information.

**IC
RATED**

90+ CRI

Wet
LocationETL
Intertek

ENERGY STAR





JA8
TITLE 24
CALIFORNIA**ORDERING INFORMATION****EXAMPLE: ICON-R-3-10-5C-38-RTM-WH**

Series	Size	Wattage	CCT	Input Voltage	Beam Angle	Trim Type	Trim Finish
ICON-R	3 - 3"	10 - 10W 15 - 15W	5C - 2700K/3000K/ 3500K/4000K/ 5000K	[Blank] - 120VAC U - 120-277VAC	24 - 24° 38 - 38° 60 - 60°	RTM - Round Trim RTL - Round Trimless RST - Round Slope Trim	BK - Black WH - White
		15 - 15W	DW - Dim to Warm: 3000K-1800K	T - 120VAC			

Accessories

- ICON-SR-2-3-NC [New Construction Plate For Trim]
- ICON-R-3-TL-NC [New Construction Plate For Trimless]
- FLEX-6 [6' Flexible Connector]
- FLEX-10 [10' Flexible Connector]
- FLEX-20 [20' Flexible Connector]
- TGS-25W-EM [25W Emergency Battery Backup]

DIMENSIONS

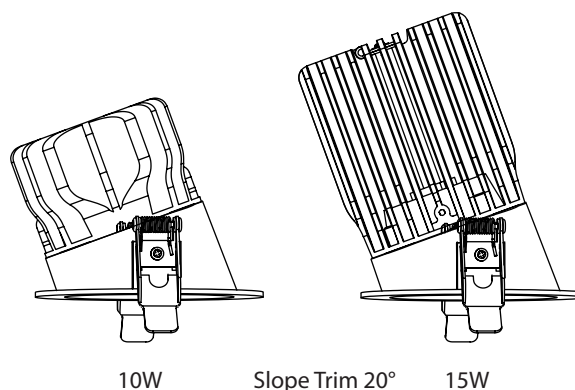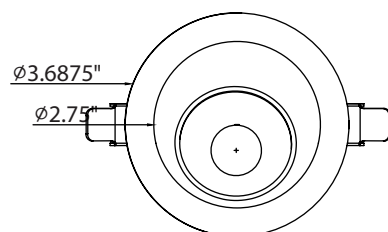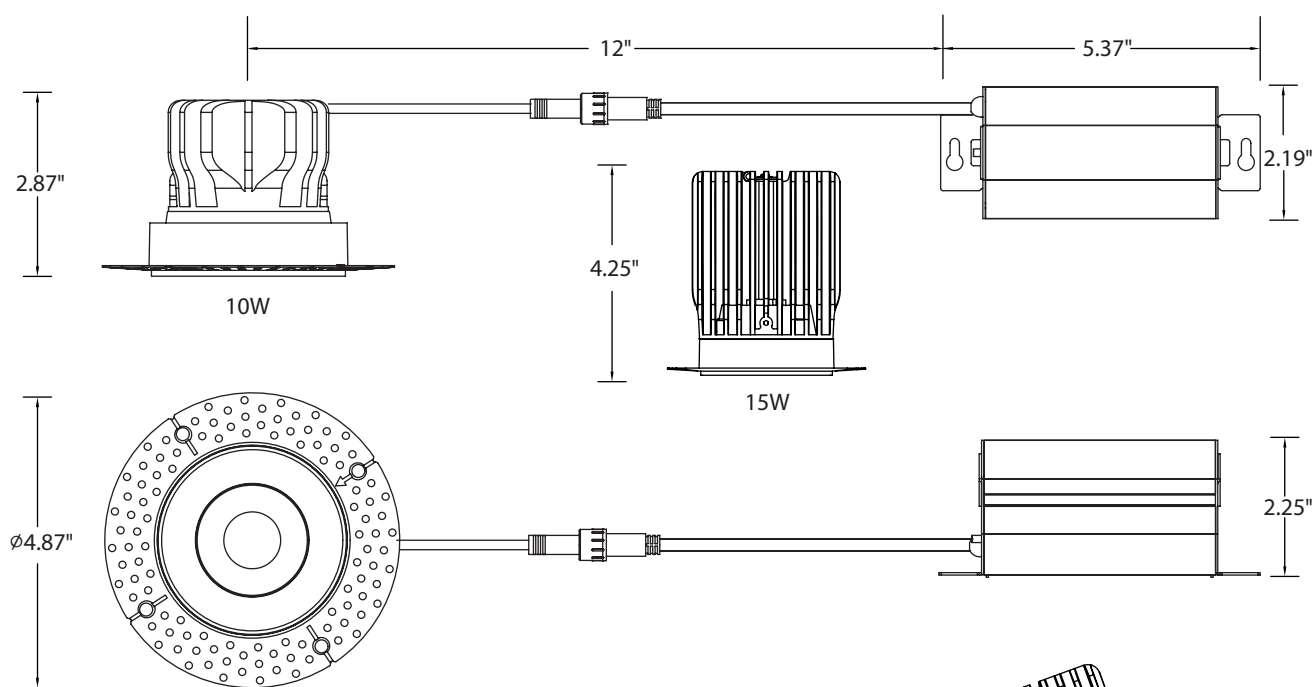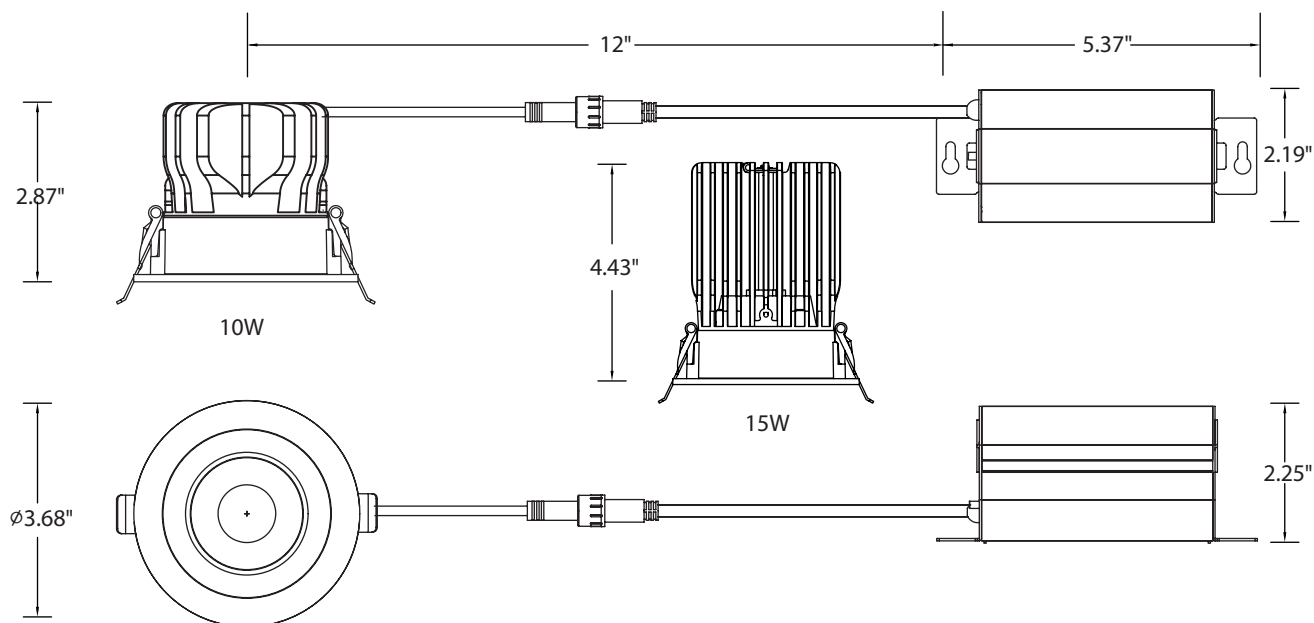


LUMEN OUTPUT

SKU	Size (in)	Wattage (W)	Beam Angle	2700K		3000K		3500K		4000K		5000K	
				Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)
ICON-R-3-10-5C-24-RTM-WH	3	10	24°	914	95	944	99	998	104	1015	106	999	107
ICON-R-3-10-5C-38-RTM-WH	3	10	38°	953	95	992	99	1041	104	1062	106	1065	107
ICON-R-3-10-5C-60-RTM-WH	3	10	60°	879	95	911	99	963	104	980	106	965	107
ICON-R-3-15-5C-24-RTM-WH	3	15	24°	1158	80	1229	83	1295	88	1319	89	1286	87
ICON-R-3-15-5C-38-RTM-WH	3	15	38°	1198	80	1251	83	1316	88	1339	89	1306	87
ICON-R-3-15-5C-60-RTM-WH	3	15	60°	1149	80	1203	83	1263	88	1284	89	1250	87

Dim to Warm				3000K			
SKU	Size (in)	Wattage (W)	Beam Angle	Delivered Lumens (lm)		Efficacy (lm/W)	
ICON-R-3-15-DW-T-24-RTM-WH	3	15	24°	993		74	
ICON-R-3-15-DW-T-38-RTM-WH	3	15	38°	1024		76	
ICON-R-3-15-DW-T-60-RTM-WH	3	15	60°	971		72	


ACCESSORIES




Round Trim
[RTM]




Round Slope Trim
[RST]



Round Trimless
[RTL]



New Construction
Plate
[For Trimless]
[ICON-R-3-TL-NC]



New Construction
Plate W/ Hanger Bars
[For Trim]
[ICON-SR-2-3-NC]



6'/10'/20'
Flexible Extension Connector
[FLEX-6]
[FLEX-10]
[FLEX-20]



25W
Emergency Battery Backup
[TGS-25W-EM]

COMPLETED PRODUCT



ICON R3™
Round Trim



ICON R3™
Round Slope Trim



ICON R3™
Round Trimless

DIMMER COMPATABILITY LIST

TRIAC Dimming:

Leviton: 6672, 6674, IPL06

Lutron: LECL-153P, CTCL-150H, LGCL-153PLH, CTCL-153P, SCL-153P, S-600P, PD-6WCL, PD-5NE, PD-10NXD, DVCL-153P, TGCL-153P, AYCL-153P, MACL-153M

Eaton: AAL06

Pass & Seymour: DCL453PTCCCV6

GE: 10464, 18027

0-10V Dimming:

Leviton: Illumitech - IP7

Lutron: Diva - DVTV, Diva - NFTV, Nova T - NTFTV

Watt Stopper: DCLV1

Lightolier Controls: ZP600FAM120

Philips: Sunrise - SR1200ZTUNV