


ICON S4™

Icon Series Square Downlight 4"

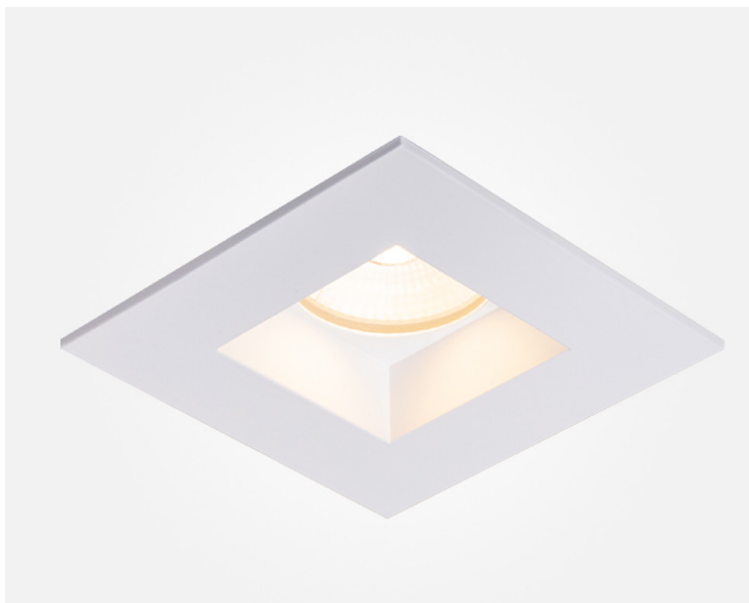


or

Field
SelectableDim
to Warm**TRIM FINISH**

See Page 3 for All Available Trim Types



White Trimless



White Trim



Black Trimless



Black Trim



White Slope Trim



Black Slope Trim

APPLICATIONS

Residential, Commercial, Multi-Family

FEATURES**Construction**

- Aluminum Housing

Finish- White Trim
- Black Trim [Option]**Electrical & Technical**

- Input Voltage: 120VAC
120-277VAC [Option]
- Input Frequency: 60Hz
- Projected Life: L70 > 50,000 hrs
- PF: >0.9
- CRI: >90
- THD: <20%
- CCT Selectable: 2700K/3000K/3500K/
4000K/5000K
- Dim to Warm: 3000K-1800K [Option]
- Operating Temp.: -4°F ~ 104°F
- Wet Location Rated
- IC Rated/Airtight Rated
- 25W Emergency Battery Backup [Option]

Optical

- White PC Lens
- Available Beam Angles:

24° Narrow

38° Medium

60° Wide

Installation/Mounting

- Spring Clip Mount [W/Trim]:
Ceiling Cutout: Ø3 3/4"
- Flush to Ceiling [Trimless]:
Ceiling Cutout: 3 3/4" x 3 3/4"

Controls

- Triac Dimming [120V]
- Dual Mode:
0-10V Dimming [120-277V] [Dims to 1%] +
Triac Dimming [120V]

Dimmer Compatibility List:

- See Page 4

Compliance

- JA8 TITLE 24 Compliant

Lumen Output

- See Page 3

Warranty

- 5 Year Warranty
- See warranty documentation for more information.

**IC
RATED**

90+ CRI

Wet
Location

Intertek



ENERGY STAR


JA8
TITLE 24
COMPLIANT**ORDERING INFORMATION****EXAMPLE: ICON-S-4-15-5C-38-STM-WH**

Series	Size	Wattage	CCT	Input Voltage	Beam Angle	Trim Type	Trim Finish
ICON-S	4 - 4"	15 - 15W 18 - 18W	5C - 2700K/3000K/ 3500K/4000K/ 5000K	[Blank] - 120VAC U - 120-277VAC	24 - 24° 38 - 38° 60 - 60°	STM - Square Trim STL - Square Trimless SST - Square Slope Trim	BK - Black WH - White
		15 - 15W	DW - Dim to Warm (3000K-1800K)	T - 120VAC			

Accessories

- ICON-SR-2-4-NCH [New Construction Plate W/ Hanger Bar For Trim]
- ICON-S-2-4-TL-NCH [New Construction Plate W/ Hanger Bar For Trimless]
- FLEX-6 [6' Flexible Connector]
- FLEX-10 [10' Flexible Connector]
- FLEX-20 [20' Flexible Connector]
- TGS-25W-EM [25W Emergency Battery Backup]

DIMENSIONS

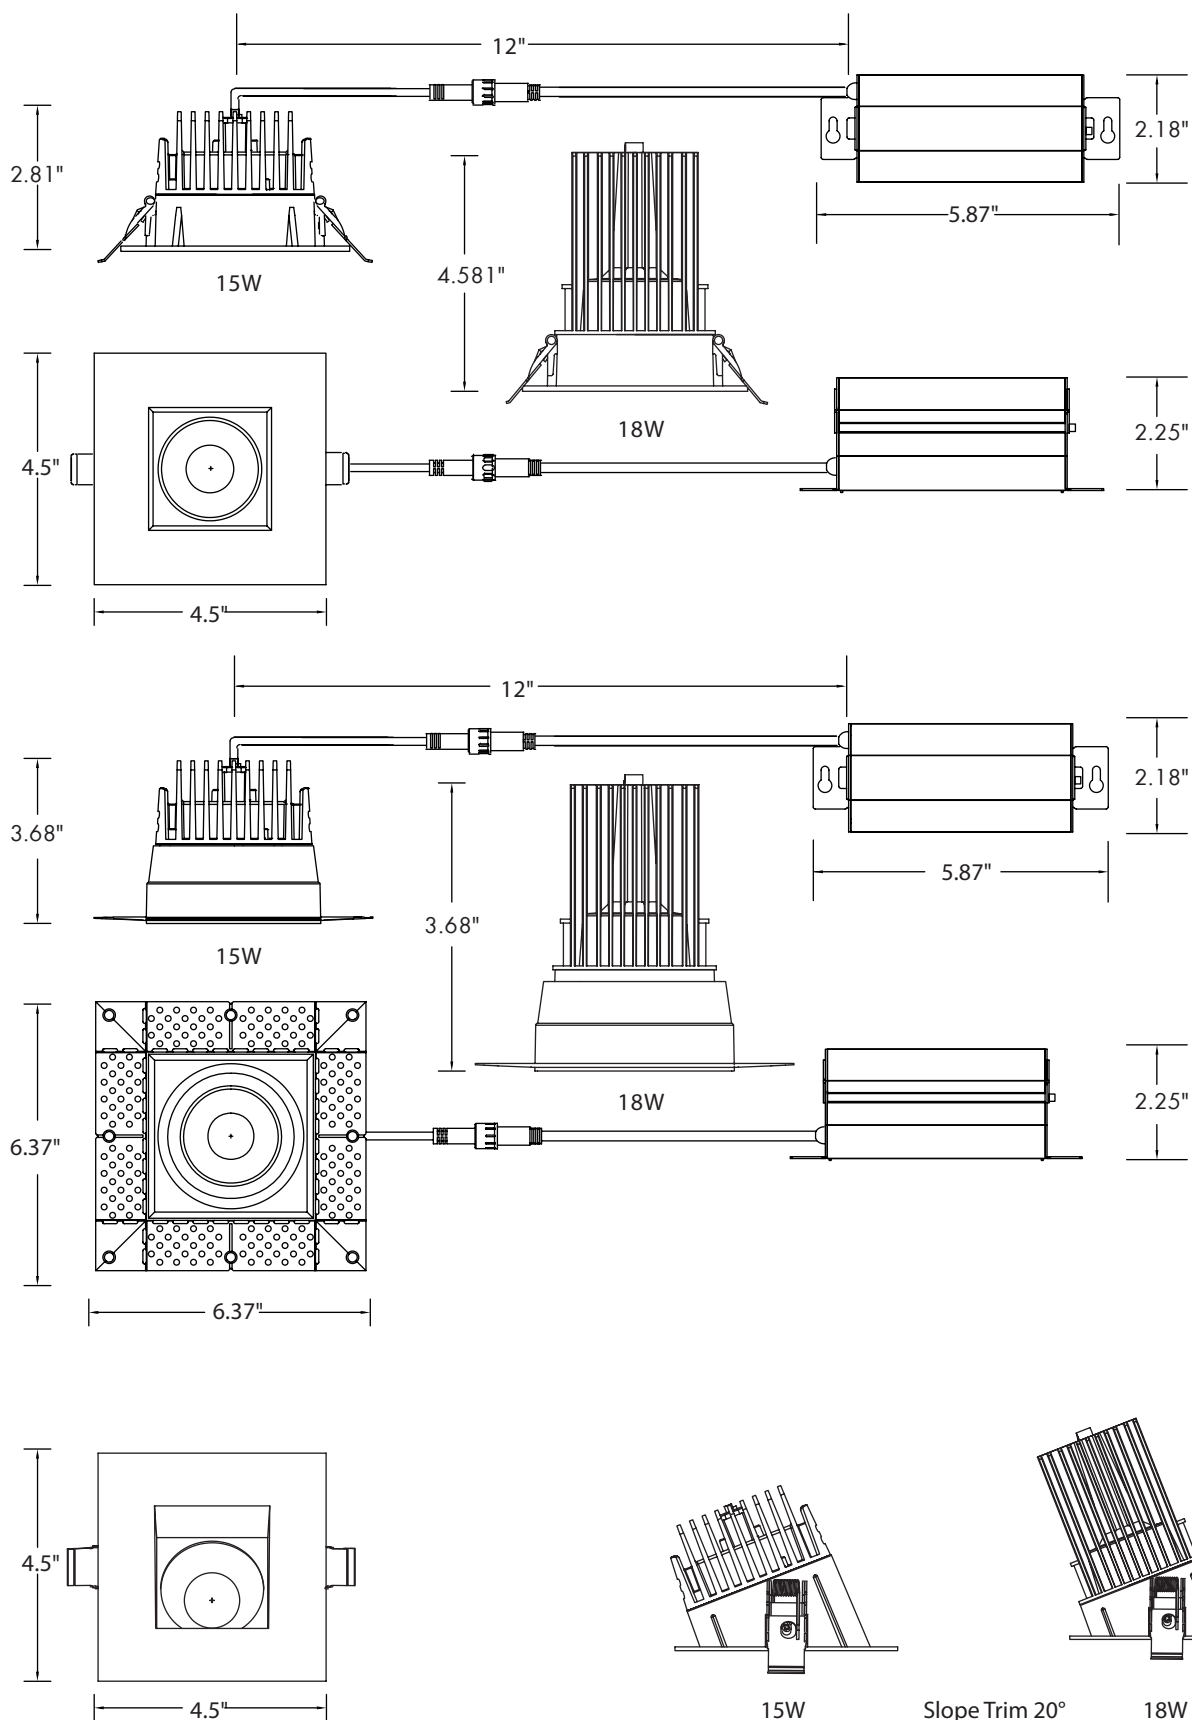

LUMEN OUTPUT

SKU	Size (in)	Wattage (W)	Beam Angle	2700K		3000K		3500K		4000K		5000K	
				Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)	Delivered Lumens (lm)	Efficacy (lm/W)
ICON-S-4-15-5C-24-STM-WH	4	15	24°	1155	87	1228	94	1287	101	1320	102	1279	94
ICON-S-4-15-5C-38-STM-WH	4	15	38°	1013	68	993	66	1092	73	1144	76	1154	77
ICON-S-4-15-5C-60-STM-WH	4	15	60°	1153	87	1208	93	1263	100	1321	103	1251	93
ICON-S-4-18-5C-24-STM-WH	4	18	24°	1803	102	1840	106	1906	113	1932	113	1911	109
ICON-S-4-18-5C-38-STM-WH	4	18	38°	1282	71	1486	83	1479	82	1577	88	1634	91
ICON-S-4-18-5C-60-STM-WH	4	18	60°	1816	104	1867	108	1943	115	1973	115	1954	112

Dim to Warm				3000K			
SKU	Size (in)	Wattage (W)	Beam Angle	Delivered Lumens (lm)		Efficacy (lm/W)	
ICON-S-4-15-DW-T-24-STM-WH	4	15	24°	958		74	
ICON-S-4-15-DW-T-38-STM-WH	4	15	38°	959		74	
ICON-S-4-15-DW-T-60-STM-WH	4	15	60°	949		73	

ACCESSORIES



Square Trim
[STM]




Square Slope Trim
[SST]



Square Trimless
[STL]



New Construction Kit
[For Trim]
[ICON-SR-2-4-NCH]



New Construction Kit
W/ Hanger Bar
[For Trimless]
[ICON-S-2-4-TL-NCH]



6'/10'/20'
Flexible Extension Connector
[FLEX-6]
[FLEX-10]
[FLEX-20]



25W
Emergency Battery Backup
[TGS-25W-EM]


COMPLETED PRODUCT



ICON S4™
Square Trim



ICON S4™
Square Slope Trim

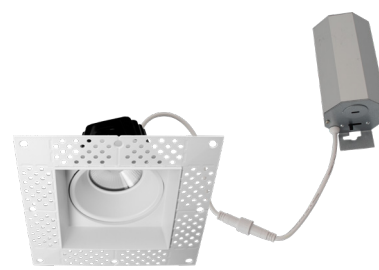

ICON S4™
Square Trimless

DIMMER COMPATABILITY LIST

TRIAC Dimming:

Leviton: 6672, 6674, IPL06

Lutron: LECL-153P, CTCL-150H, LGCL-153PLH, CTCL-153P, SCL-153P, S-600P, PD-6WCL, PD-5NE, PD-10NXD, DVCL-153P, TGCL-153P, AYCL-153P, MACL-153M

Eaton: AAL06

Pass & Seymour: DCL453PTCCCV6

GE: 10464, 18027

0-10V Dimming:

Leviton: Illumitech - IP7

Lutron: Diva - DVTV, Diva - NFTV, Nova T - NTFTV

Watt Stopper: DCLV1

Lightolier Controls: ZP600FAM120

Philips: Sunrise - SR1200ZTUNV