

Recessed LED Emergency Unit

FEATURES

- Two fully adjustable 1.0W white LED lamp heads.
- High performance chrome-plated metal reflectors and plastic lens for optimal light distribution.
- Durable 20-gauge steel trim plate in white or black finish.
- Trim securely attached to housing with spring clips.
- Bar hangers on the back box for recessed mount.
- Compatible with drop ceiling mount installations. Bar hangers included.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free, rechargeable sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity of 10W standard.

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
LER-BB	5.0	5.0	0.05	0.03

Model	Battery	Remote Capacity	COMPATIBLE REMOTE HEAD FAMILY												
			RHL			RH16LED	RH16		RH		RHR		SRH		SRHLED
			3.6V	9.6V	MV		6V	12V	6V	12V	6V	12V	6V	12V	
LER-BB	6V	10W			X	X	X		X		X		X		X

CODES

- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for dry locations. (25°C)

WARRANTY

- 5 year total customer satisfaction warranty.
For details see Signtex product catalog technical data section.

FIXTURE ORDERING INFORMATION EXAMPLE: OWLBBW

SERIES	OPERATION	HOUSING COLOR
LER	BB Battery Unit	(Blank) White B Black

PROJECT:


TYPE:

CATALOG #:

PATHLITE
Series LER
REV #: LER.08.26.01



DIMENSIONS

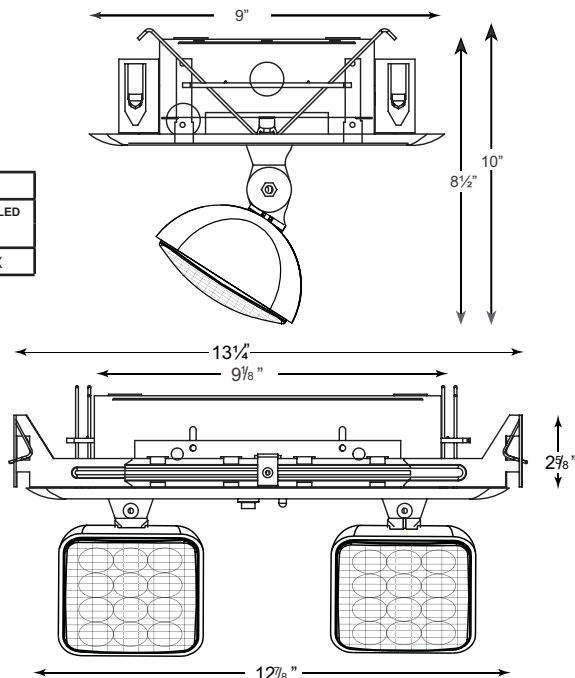

STANDARD

