



FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_



**GENERAL INFORMATION:**

The FLICK Recessed Wall Luminaire is a compact and durable LED fixture designed for stairway and pathway lighting. Made from die-cast dark gray powder-coated aluminum with a precision glass lens, it operates on 110–277V and provides focused, efficient illumination. Engineered for long-lasting performance, FLICK features an IP65 weatherproof and IK10 impact-resistant rating. Available in round and square designs with Sanded Dark Gray, Sanded Black, and Sanded Silver Gray finishes, it offers both style and reliability for modern architectural spaces.

**FIXTURE TYPE:**

Recessed Wall Luminaires - Stair/Pathway

**LIGHTING:**

LED

LED

**VOLTAGE:**

110-277V



**MATERIAL:**

12# Die-casting dark grey powder coated aluminum

**LENS:**

Glass

**BEAM ANGLE:**

80°

**RECESSED SLEEVE:**

PC/ABS ALLOYS 188#

**IP RATING:**

IP 65

IP65

**IK RATING:**

IK 10

**FINISHING:**

Sanded Dark Gray

Sanded Black

Sanded Silver Gray

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083


USA

FIXTURE TYPE: \_\_\_\_\_


PROJECT NAME: \_\_\_\_\_

NOTES:

**-B1QR0102**

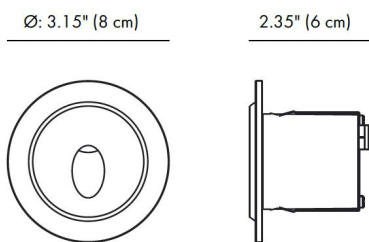

**-B1QS0102**



**LED**



**IP65**



## HOW TO ORDER:

**CODE:**

Example:

CODE: BO-FLK-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XX

BO-FLK-KPG-RWL-  
B1QR0102-K30-  
KAP7037-DIM

**1**

## MODELS:

**CODE -B1QR0102**

### DIMENSIONS:

Diameter - Ø: 3.15" (8 cm)

Depth - P: 2.35" (6 cm)

### LIGHT SOURCE:

LED / 1 x 3W / 110 mA / 62 lm / 110-277V / CRI 80

**CODE -B1QS0102**

### DIMENSIONS:

Length / Width- L/W: 3.15" (8 cm)

Depth - P: 2.35" (6 cm)

### LIGHT SOURCE:

LED / 1 x 3W / 110 mA / 62 lm / 110-277V / CRI 80

**2**

## CCT OPTIONS:

-K30 3000K

-CUS Custom on request\*

**3**

## FINISH OPTIONS:

-KAP7037 Sanded Dark Gray

-RAL 9005 Sanded Black

-RAL9022 Sanded Silver Gray

**4**

## DIMMING OPTIONS:

-DIM 1-10V

-PWM Pulse Width Modulation

-DALI DALI (Digital Addressable Lighting Interface)

**5**


## RECESSED SLEEVE: (included)

188#




3.34"  
(8.5 cm)

3.34" (8.5 cm)



3.54" (9 cm)



sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

NOTES:



## HOW TO ORDER:

**CODE:**

Example:

CODE: BO-FLK-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XX

BO-FLK-KPG-RWL-  
B1QR0102-K30-  
KAP7037-DIM

**6**

## FEATURES:




Front cover without screws

Use the high-strength clips for installation and fixation.(please refer remark 1)


**7**

## DIAGRAM OF INSTRUCTION:

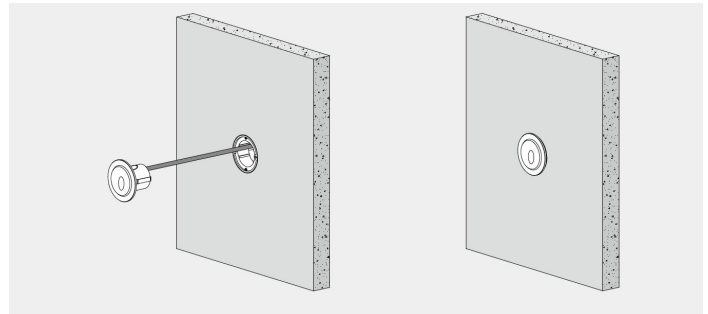

**8**

## PHOTOMETRIC INFO:

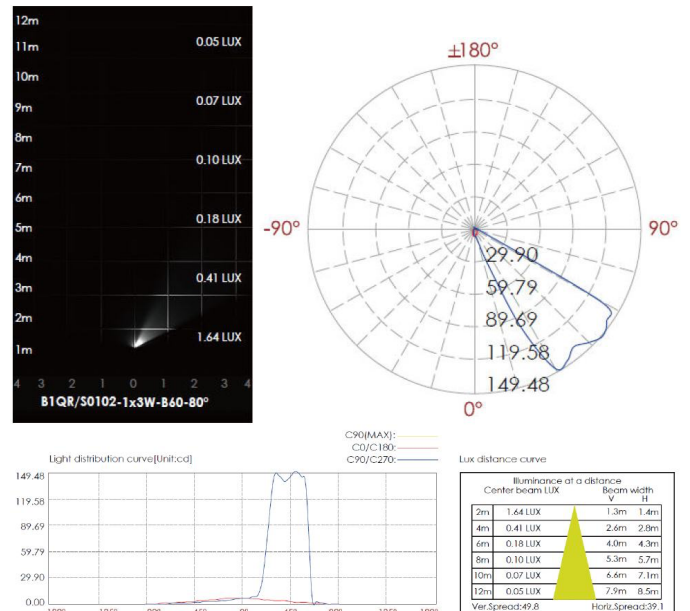

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA