


UPGRADED



IP66

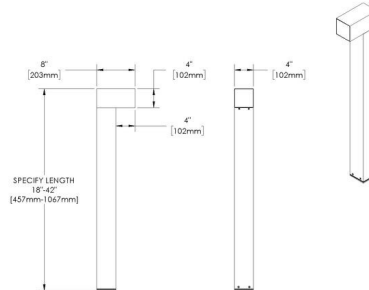

Features



Lens factory adhered to fixture cap providing hermetically sealed optical compartment



Secured with flush, countersunk tamper resistant hardware



Manufactured in the USA with sustainable processes




Easily replaceable modular components reduce waste and extend fixture life

UNION - Bollard - Line Voltage Driver - LED COB


Technical

Driver: Line Voltage Driver	Mount: Anchor Base
Light Source (Type): LED COB	Input Voltage: 120V, 277V
Material: Aluminum	Size: Height: 18", Height: 24", Height: 30", Height: 36", Height: 42"
CCT (K): 2700, 3000, 3500, 4000	Lens: Clear (Standard)
CRI: Ra > 80, R9 > 15	Shielding: Not included (Standard)
Input Power (W): 20	Wiring Length: Standard
Delivered Lumens (lm): 784 - 1292	Finish: Standard Finishes, Premium Finishes, Other
Control: 0-10V, ELV Dimming (For use with Electronic Low Voltage Dimmer), INC Dimming (For use with Incandescent Dimmer), Non-dimming	Option: Receptacle with 1-A-USB and 1-C-USB port, Receptacle with 20A GFCI, Receptacle with RJ45 Jack

Optics



T2-F - Type II - Forward



T2-W - Type II - Wide

Products (Listed: 10)

- 1

Aluminum - Anchor Base - 120V - Height: 42"
UO-BO-LID-LCB-AL-AB-120-H42

[SPEC SHEET](#)

[INSTALLATION INSTRUCTIONS](#)

[CONFIGURE THIS PRODUCT](#)

2

Aluminum - Anchor Base - 120V - Height: 18"
UO-BO-LID-LCB-AL-AB-120-H18

[SPEC SHEET](#)

[INSTALLATION INSTRUCTIONS](#)

[CONFIGURE THIS PRODUCT](#)

3


Aluminum - Anchor Base - 120V - Height: 24"
UO-BO-LID-LCB-AL-AB-120-H24

[SPEC SHEET](#)

[INSTALLATION INSTRUCTIONS](#)

[CONFIGURE THIS PRODUCT](#)

4




Aluminum - Anchor Base - 120V - Height: 30"
UO-BO-LID-LCB-AL-AB-120-H30

[SPEC SHEET](#)

[INSTALLATION INSTRUCTIONS](#)

[CONFIGURE THIS PRODUCT](#)

5




Aluminum - Anchor Base - 120V - Height: 36"
UO-BO-LID-LCB-AL-AB-120-H36

[SPEC SHEET](#)

[INSTALLATION INSTRUCTIONS](#)

[CONFIGURE THIS PRODUCT](#)

6




Aluminum - Anchor Base - 277V - Height: 42"
UO-BO-LID-LCB-AL-AB-277-H42

[SPEC SHEET](#)

[INSTALLATION INSTRUCTIONS](#)

[CONFIGURE THIS PRODUCT](#)

7




Aluminum - Anchor Base - 277V - Height: 18"
UO-BO-LID-LCB-AL-AB-277-H18

[SPEC SHEET](#)

[INSTALLATION INSTRUCTIONS](#)

[CONFIGURE THIS PRODUCT](#)

8




Aluminum - Anchor Base - 277V - Height: 24"
UO-BO-LID-LCB-AL-AB-277-H24

[SPEC SHEET](#)

[INSTALLATION INSTRUCTIONS](#)

[CONFIGURE THIS PRODUCT](#)

9




Aluminum - Anchor Base - 277V - Height: 30"
UO-BO-LID-LCB-AL-AB-277-H30

[SPEC SHEET](#)

[INSTALLATION INSTRUCTIONS](#)

[CONFIGURE THIS PRODUCT](#)

10



Aluminum - Anchor Base - 277V - Height: 36"
UO-BO-LID-LCB-AL-AB-277-H36

[SPEC SHEET](#)

[INSTALLATION INSTRUCTIONS](#)

[CONFIGURE THIS PRODUCT](#)