



# NANOLUME HD

Micro Profile LED Task and Cove Fixture



Customer: \_\_\_\_\_ Date: \_\_\_\_\_ Type: \_\_\_\_\_

Project: \_\_\_\_\_

<b>Wattage</b>	6W or 10W per linear ft.
<b>Input Volatage</b>	90-120V or 230-277V
<b>Control</b>	Forward/Reverse Phase Line Dimmer 0-10V*, DALI*, DMX*
<b>LED Spacing</b>	5/8" on Center
<b>Length</b>	12-72", in 6" increment allow 1/4" for each end cap and 1.25" for power feed cable
<b>Total Width</b>	1.01"
<b>Total Height</b>	1.09"
<b>Color Options</b>	2000K, 2200K, 2400K, 2700K, 3000K, 3500K, 4000K, 5000K, 6500K
<b>Mounting</b>	Fixed or Hinge
<b>Available Optics</b>	15°x45°, 120°x120°
<b>CRI</b>	95+ CRI
<b>Rating</b>	IP50
<b>Finish</b>	Clear Anodized Aluminum
<b>Material</b>	Anodized Aluminum
<b>Custom</b>	Contact Factory
<b>Dimming</b>	Patented CleanDim® Technology ensures even dimming from 0-100%.
<b>Max Run</b>	46ft. @ 120V (10W), 160ft. @277V (6W)
<b>Environmental</b>	Operating temperature: -40°F-140°F Ambient(-40°C-60°C)** Storage temperature: -40°F-140°F Ambient indoor fixtures operation limited to =<50% relative humidity

\*Uses Boca SDS Module for 0-10V, DALI, or DMX Dimming.

\*\* Military spec available under special request-lead times may be impacted.




## PRODUCT SPECIFICATIONS:

PRODUCT	WATTAGE	COLOR OPTION	VOLTAGE	OPTIC	FINISH	MOUNTING	LENS	BAFFLE	REFLECTOR*	DIMMING*	ACCESSORY
NANO HD											
	<b>6W</b> <b>10W</b>	<b>2000K</b> <b>2200K</b> <b>2400K</b> <b>2700K</b> <b>3000K</b> <b>3500K</b> <b>4000K</b> <b>5000K</b> <b>6500K*</b> <b>Amber</b> <b>Red</b> <b>Green</b> <b>Blue</b>	<b>120V</b> <b>277V</b>	<b>15°x45°</b> <b>120°x120°</b>	<b>A</b> Clear Anodized Aluminum	<b>F5</b> Fixed Short <b>FT</b> Fixed Tall <b>S</b> Swivel <b>H</b> Hinge <b>3Arc</b> 3" Arc Swivel <b>6Arc</b> 6" Arc Swivel	<b>C</b> Clear <b>D</b> Diffused	<b>SB</b> Square Baffle <b>ASYM</b> Asymmetric Baffle <b>SKB</b> Kicker Baffle <b>HL</b> Hexcell Louver* <b>N</b> No Baffle	<b>Y</b> Yes <b>N</b> No	<b>STANDARD DIMMING</b> <b>0-10V DIRECT</b> 1 Channel <b>0-10V REMOTE</b> <b>DMX REMOTE</b> <b>DALI REMOTE</b>	<b>T</b> Track Mount (Only available with Fixed Mounting)  Note: Knife Edge Cove compatible.
		*Only available with 80 CRI						*Cannot be used with Satin Ice White or 120° optic	*Boosts overall output by 10% *Only Available with 120° Optics	*Extra Charge May Apply	


## DIMENSIONS:

Third Clip Required for 48" and Larger Fixtures

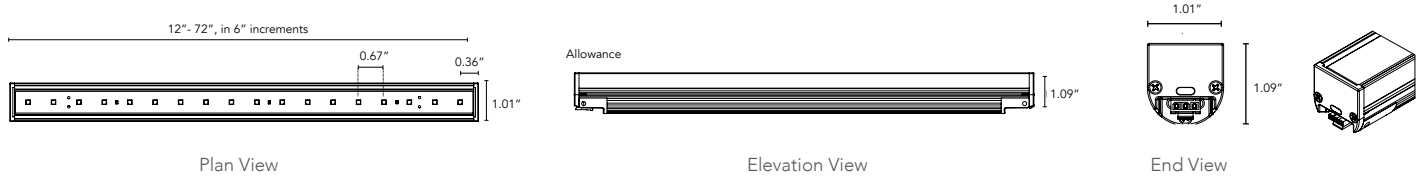



## MOUNTING INFORMATION:

For vertical installation and installations above 4' please contact the factory for specific mounting instructions.

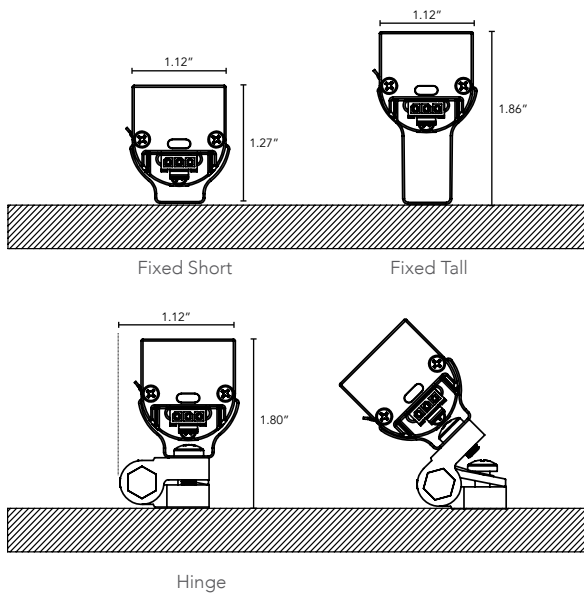

## ACCESSORY:

Track Mount Clip System is only available with Fixed Mounting.

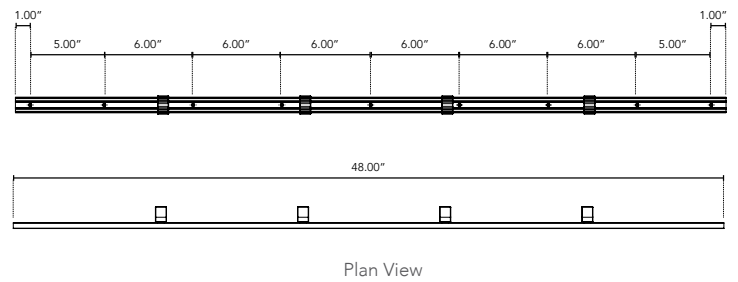

## LUMINAIRE INFORMATION:

CCT (K)	Wattage	Lumens	LPW
2000	10	718	72
2400	10	850	85
2700	10	936	94
3000	10	980	98
3500	10	1030	103
4000	10	1060	106

\* Typical delivered lumen data is approximate. Actual lumens will vary due to installation environment and beam pattern. Please see IES files.