

PFX-9701

Undercabinet Light color Temperature selectable

STANDARD




FEATURES

- Field selectable 2700k (soft white), 3000k (warm white), 3500k(warm/neutral white), 4000k (neutral white), and 5000k (cool white) color temperatures.*
- Long-life LEDs provide up to 196,000 hours of operation with at least 70% of initial lumen output (L70).**
- Available models provide from 334 to 1,543 nominal lumens.*
- 120 AC voltage (60Hz) is standard.
- Triac dimmable.
- Power factor > 90.
- Total harmonic distortion < 20%.
- Color rendering index > 90.
- Steel housing.
- Polycarbonate lens.
- Knockouts on sides and back simplify electrical connections.
- Keyhole slots provide for easy installation in new construction or retrofit applications.

* Contact factory for other color temperatures and lumen packages.
** L70 hours are IES TM-21-11 calculated hours.



DIMENSIONS

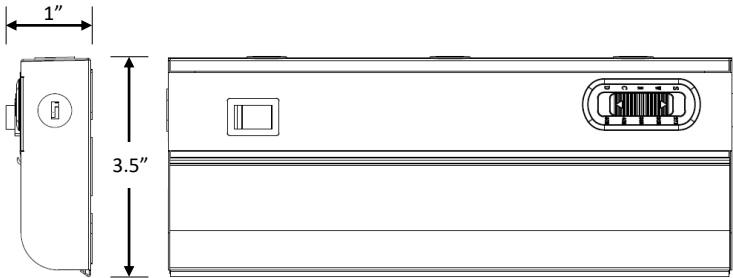

WARRANTY / LISTING

- cULus listed for damp locations.
- Complies with FCC Part 15, class B.
- Complies with ANSI/IEEE C62.41.1-2002, surge immunity protection (2.5kV).
- 5-year warranty of all electronics and housing.

Series	PFX-9701						
Length	9"	12"	18"	21"	24"	33"	42"
Weight (lbs)	0.80	1	1.30	1.60	1.70	2.40	3

ORDERING GUIDE

Example: PFX-9701-24

Series	Length (in)	Color Temperature
PFX-9701	9	2700k
	12	3000k
	18	3500k
	21	4000k
	24	5000k
	33	
	42	

Disclaimer: Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

PFX-9701

Undercabinet Light color Temperature selectable

STANDARD

ELECTRICAL DATA

Series	Measurements	PFX-9701-9					PFX-9701-12				
		2700K	3000K	3500K	4000K	5000K	2700K	3000K	3500K	4000K	5000K
PFX-9701	Lumens	334	391	398	412	391	390	414	439	450	444
	Watts	5	5	5	5	5	5	5	5	5	5
	Efficacy	66	73	82	86	79	78	83	90	92	88
	Input Current (A)	120V = 0.04A	120V = 0.04A	120V = 0.04A	120V = 0.04A	120V = 0.04A	120V = 0.04A	120V = 0.04A	120V = 0.04A	120V = 0.04A	120V = 0.04A

Series	Measurements	PFX-9701-18					PFX-9701-21				
		2700K	3000K	3500K	4000K	5000K	2700K	3000K	3500K	4000K	5000K
PFX-9701	Lumens	673	719	760	770	720	665	703	742	764	746
	Watts	9	9	9	9	9	9	9	9	9	9
	Efficacy	75	81	88	88	79	76	81	87	90	85
	Input Current (A)	120V = 0.08A	120V = 0.08A	120V = 0.08A	120V = 0.08A	120V = 0.08A	120V = 0.08A	120V = 0.08A	120V = 0.08A	120V = 0.08A	120V = 0.08A

Series	Measurements	PFX-9701-24					PFX-9701-33				
		2700K	3000K	3500K	4000K	5000K	2700K	3000K	3500K	4000K	5000K
PFX-9701	Lumens	696	736	779	803	786	1064	1152	1214	1245	1202
	Watts	9	9	9	9	9	14	14	14	14	14
	Efficacy	76	82	88	91	86	76	84	90	91	85
	Input Current (A)	120V = 0.08A	120V = 0.08A	120V = 0.08A	120V = 0.08A	120V = 0.08A	120V = 0.12A	120V = 0.12A	120V = 0.12A	120V = 0.12A	120V = 0.12A

Series	Measurements	PFX-9701-42				
		2700K	3000K	3500K	4000K	5000K
PFX-9701	Lumens	1315	1415	1514	1543	1488
	Watts	18	18	18	18	18
	Efficacy	72	79	87	88	82
	Input Current (A)	120V = 0.15A	120V = 0.15A	120V = 0.15A	120V = 0.15A	120V = 0.15A

Disclaimer:isclaimer:
Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.