


PFX-5102
LED BACK-LIT PANEL

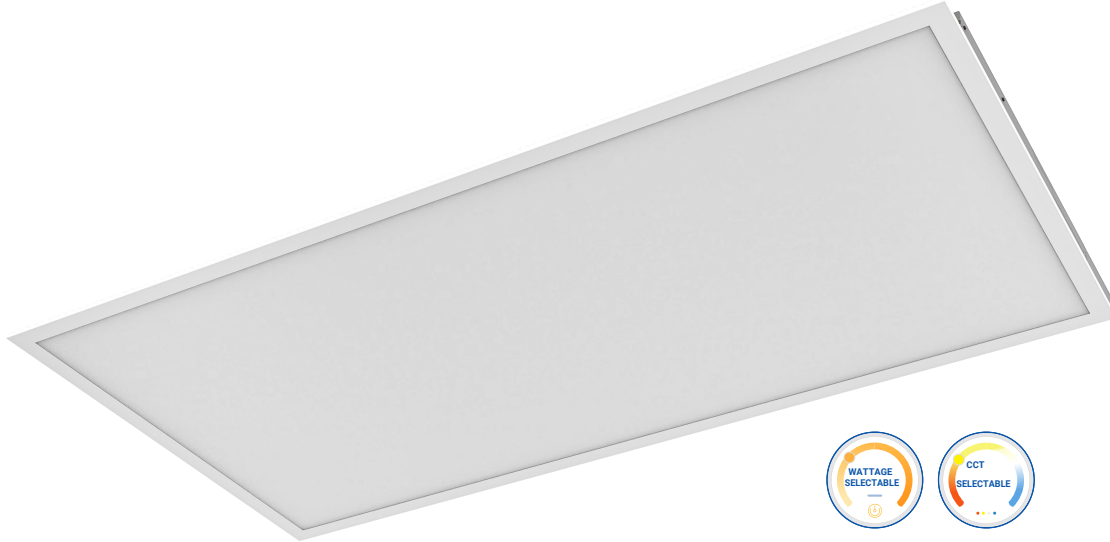

2x2/2x4/1x4ft LED Back-lit Panel, 120 – 277V Input, 0 – 10V Dimming

FEATURES

- 6 CCT selectable and 5 Watts selectable
- Powered by 0 – 10V dimming LED drivers with 12V Aux
- Available with sensor/EM Driver/Mount Kit
- Five-year limited warranty
- DLC/ ETL/FCC are certificated
- TAA (Made in Mexico)
- THD: < 20%
- Power factor > 0.95

ORDERING GUIDE

Example: PFX-5102-75WS-50K-AC

Model No.	Watt select.	CCT select.	Voltage	Lumens	CRI	PF	Size
PFX-5102-1X4-15/20/30/40/50 W-6CCT-S1	15/20/30/40/50W	3000/3500/4000/5000/ 5700/6500K	AC120-277V	6250lm	>80	>0.95	1x4FT
PFX-5102-2X2-15/20/30/40/50 W-6CCT-S1	15/20/30/40/50W	3000/3500/4000/5000/ 5700/6500K	AC120-277V	6250lm	>80	>0.95	2x2FT
PFX-5102-2X4-20/30/40/50/75 W-6CCT-S1	20/30/40/50/75W	3000/3500/4000/5000/ 5700/6500K	AC120-277V	9375lm	>80	>0.95	2x4FT

Disclaimer:



Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

PFX-5102
LED BACK-LIT PANEL





PHOTOMETRICS

PFX-5102-2X2-15/20/30/40/50W-6CCT-S1

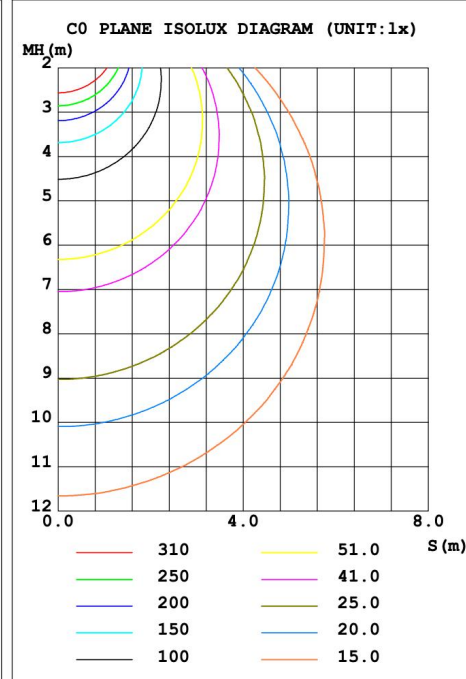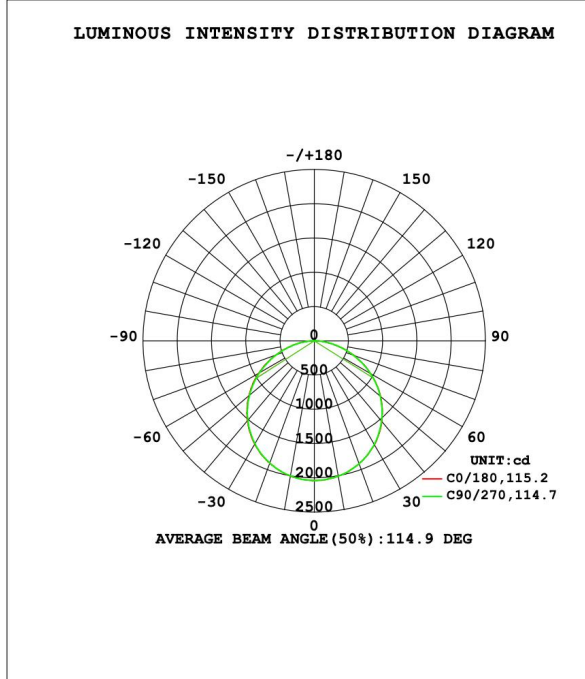

PFX-5102-1X4-15/20/30/40/50W-6CCT-S1

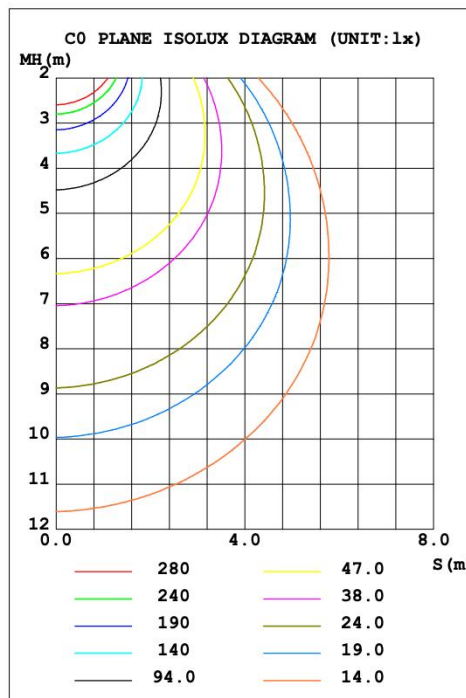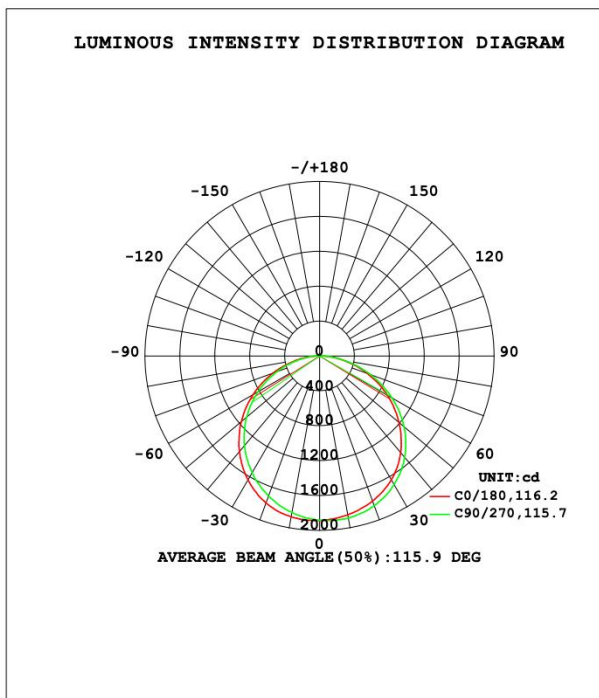


Disclaimer:
 Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

PFX-5102
LED BACK-LIT PANEL



PHOTOMETRICS

PFX-5102-2X4-20/30/40/50/75W-6CCT-S1

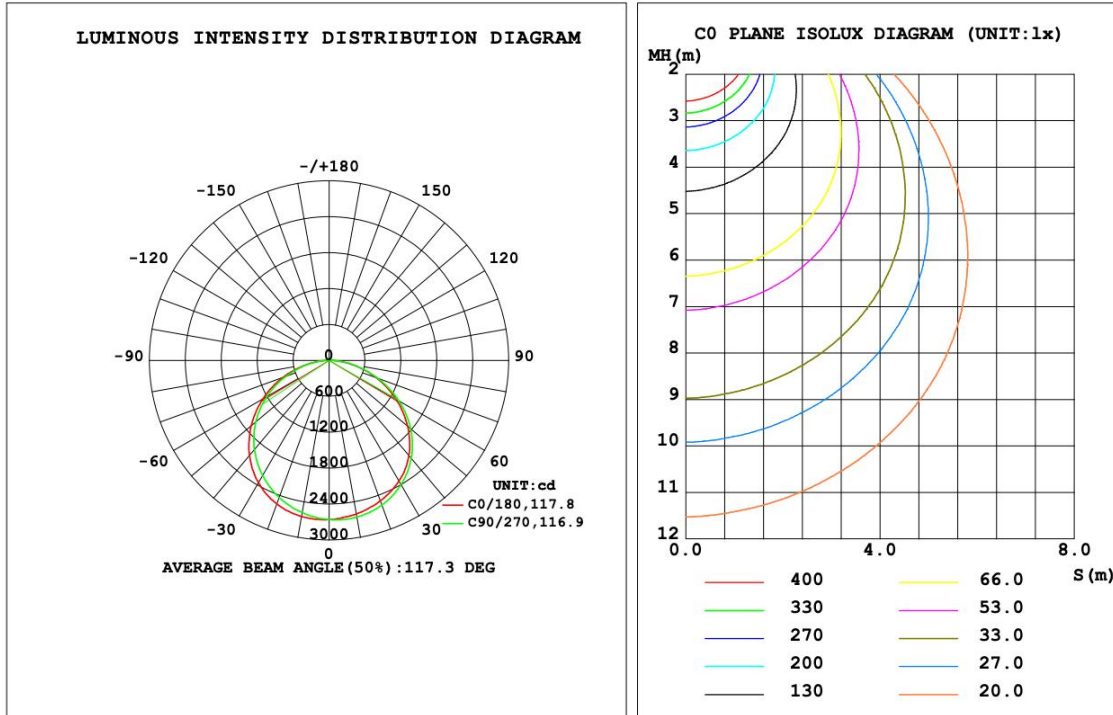

ACCESSORIES

Microwave Sensor (field-installable purchased separately)

Item	Model	Description
ACC0-Sensor-microwave(BPL)	US002-01VR-2	DC input Remote control (Refer to its spec for more detail).

note: Reference image



Disclaimer:
 Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

PFX-5102
LED BACK-LIT PANEL



ACCESSORIES

EM Driver (field-installable purchased separately)

Item	Model	Description
ACC0-9W Driver---ES-EIH09-01SL	EM	HSE-EIH09-01SL
		9W/up to 90 minutes (Refer to its spec for more detail).

note: Reference image



Surface Mount Kit & Recessed Mount Kit (field-installable purchased separately)

Item	Description
ACC2-SMK-1X4-55MM	Surface Mount Kit /55mm height
ACC2-SMK-2X2-55MM	Surface Mount Kit /55mm height
ACC2-SMK-2X4-55MM	Surface Mount Kit /55mm height
ACC2-SMK-2X2-78MM	Surface Mount Kit /78mm height
ACC2-SMK-2X4-78MM	Surface Mount Kit /78mm height
ACC2-Recessed frame-1X4 (Flange kit)	Recessed Mount Kit
ACC2-Recessed frame-2X2 (Flange kit)	Recessed Mount Kit
ACC2-Recessed frame-2X4 (Flange kit)	Recessed Mount Kit


Disclaimer:
Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

PFX-5102
LED BACK-LIT PANEL



Surface Mount Kit & Recessed Mount Kit (field-installable purchased separately)

note: Reference image (Refer to its spec for more detail).

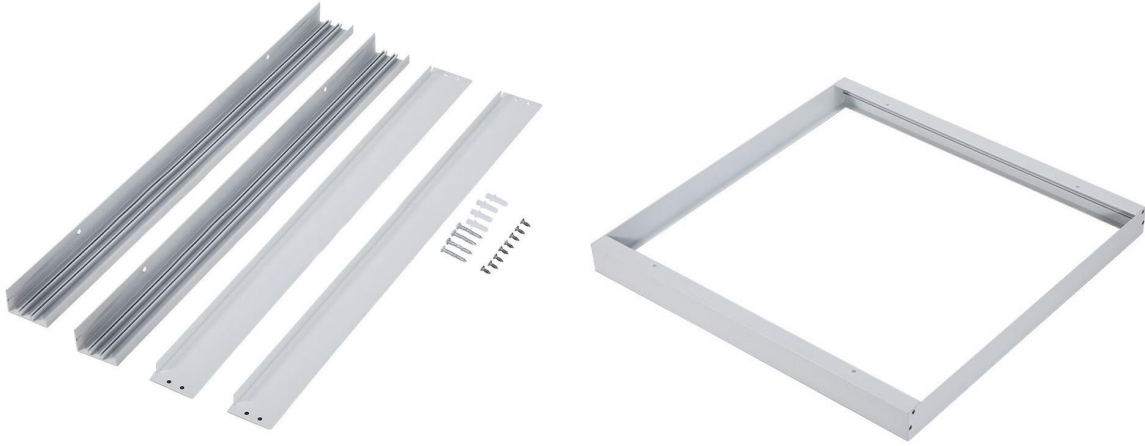

DIMENSIONS

	Watt	A	B	C
	15/20/30/40/50W	604mm/23.78"	604mm/23.78"	33mm/1.30"
	15/20/30/40/50W	1214mm/47.80"	304mm/11.97"	33mm/1.30"
	20/30/40/50/75W	1214mm/47.80"	604mm/23.78"	33mm/1.30"

PACKING

Watt	Outer Carton	QTY/CTN	Weight	QTY/Pallet
15/20/30/40/50W	645*162*658mm	4 pcs	19lbs	144pcs
15/20/30/40/50W	1255*162*358mm	4 pcs	20lbs	144pcs
20/30/40/50/75W	1255*162*658mm	4 pcs	35lbs	72pcs

Disclaimer:
Due to the rapid pace of technology change in the Lighting industry, the Information and Data presented in this spec sheet is for reference purposes only, please confirm with PARAFLEX at the time of finalizing the order or design. PARAFLEX does not warrant or represent that the information is free from errors or omission. The information may change without notice and PARAFLEX is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.