



**BULLARD
BOLLARDS**
Think Bollard Think Bullard

MEGA AXIS STRAP SQ 70 SPOTLIGHT





**BULLARD
BOLLARDS**
Think Bollard Think Bullard

**CODE:
BB-MGAXSSTR-SQ70-SP-GH**

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



GENERAL INFORMATION:

The Mega Axis Strap SQ 70 Spotlight is a compact, versatile outdoor LED fixture designed for flexible accent lighting on trees, poles, walls, and ground-mounted applications. Featuring a durable stainless steel and extruded aluminum construction with an IP67 rating, it is built to withstand harsh exterior environments while maintaining a clean, architectural aesthetic. The adjustable head allows precise aiming with $\pm 90^\circ$ tilt and near-full rotation, complemented by multiple beam options from 18° to 65° for controlled medium flood illumination. Available in 3000K or 4000K with CRI >90 , it delivers clear, comfortable light with excellent color rendering. With a remote driver, strap mounting system, multiple dimming options, and a wide range of finishes and accessories, the Mega Axis Strap SQ 70 offers exceptional adaptability for landscape and architectural lighting designs.

FIXTURE TYPE:

Spot Lights

LIGHTING:

LED

GASKETS:

Silicone gaskets

APPLICATION FIELD:

Series of spot lights to be mounted on floor, wall, spike, tree with belt system or on a pole system.

VOLTAGE:

110-277V



MATERIAL:

Stainless steel AISI 316L

Extruded aluminum EN AW-6063 T5 high resistance to oxidation

EXTERNAL SCREWS:

Stainless steel A4-70 treated with highly antioxidant water-repellent lubricating solution

DIFFUSER MATERIAL:

Tempered glass 4mm

IP RATING:

IP 67

IP67

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA



**BULLARD
BOLLARDS**
Think Bollard Think Bullard

**CODE:
BB-MGAXSSTR-SQ70-SP-GH**

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



APPLINCE CLASS:

|||

DRIVER POSITION:

Remote

CRI:

>90

CONTROL GEAR TYPE:

Electronic

CABLE ENTRY:

M16 resin-coated metal cable gland

CORD LENGTH:

0.5m

SWIVEL:

+/- 90°

ROTATION:

+/- 359°

LIGHT DISTRIBUTION:

18° - Symmetrical medium flood (15 ° - 45 °)
38° - Symmetrical medium flood (15 ° - 45 °)
65° - Symmetrical medium flood (15 ° - 45 °)

BEAM DIRECTIONABILITY:

Adjustable

OPTICS:

Anti UV technopolymer lens

WARRANTY:

LED lighting products are warranted for 5 years.

MAIN FEATURES:

High visual comfort / Wide range of finishes / Functional design
Minimal design / Shock resistant
Operating Temperature: -22°F~122°F

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA




**BULLARD
BOLLARDS**
Think Bollard Think Bullard

**CODE:
BB-MGAXSSTR-SQ70-SP-GH**

FIXTURE TYPE: _____

PROJECT NAME: _____

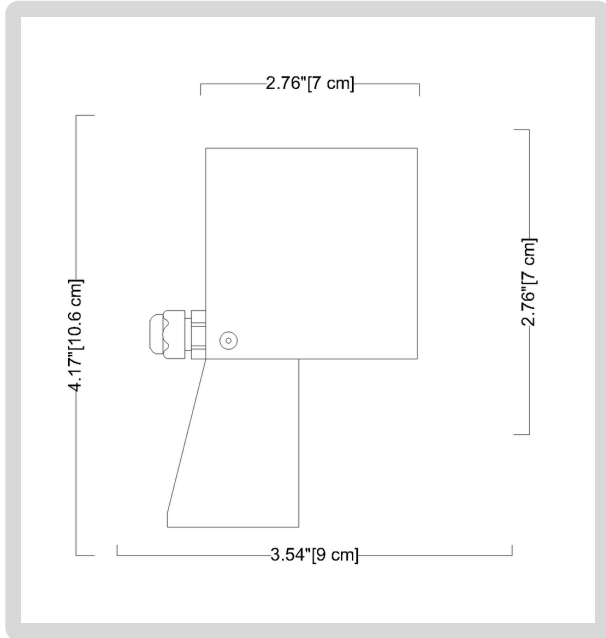

HOW TO ORDER:

CODE:

Example:
CODE: BB-MGAXSSTR-SQ70-SP-GH-L1-B2-DIM-02-AC204

BB-MGAXSSTR-
SQ70-SP-GH-L1-
B2-DIM-02-
AC204

1 DIMENSIONS:

A) Width - W: 2.76" (7 cm)
B) Length - L: 2.76" (7 cm)
C) Height - H: 4.17" (10.6 cm)

2 LIGHT SOURCE:

-L1 LED / 1 x 8 W / 3000K / 740 lm
-L2 LED / 1 x 8 W / 4000K / 790 lm

3 BEAM ANGLE:

-B1 18°
-B2 38°
-B3 65°

4 DIMMING OPTIONS:

-NON NON-Dimmable
-DIM 0-10V
-CAS Casambi
-DAL Dali

5 FINISH OPTIONS:

-01 White matt	-45 Corten matt
-02 Black matt	-62 Antique grey matt
-05 Anthracite grey matt	-65 Blue matt
-19 Light grey matt	-80 Sand matt
-26 Bronze	-83 Green matt

6 ACCESSORIES:

-AC204 IP 68 fast connector 4P
-AC203 Stake 170mm



THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA



**BULLARD
BOLLARDS**
Think Bollard Think Bullard

**CODE:
BB-MGAXSSTR-SQ70-SP-GH**

FIXTURE TYPE: _____

PROJECT NAME: _____

HOW TO ORDER:


CODE:

**Example:
CODE: BB-MGAXSSTR-SQ70-SP-GH-L1-B2
-DIM-02-AC204**

BB-MGAXSSTR-
SQ70-SP-GH-L1-
B2-DIM-02-
AC204


PHOTOMETRY:

18° / 3000K




H(m)	φ (m)	lux med. 3000 K	lux max. 3000 K
5	1.6	62	99
4	1.3	98	155
3	1.0	173	276
2	0.6	390	621
1	0.3	1560	2484

18° / 4000K




H(m)	φ (m)	lux med. 4000 K	lux max. 4000 K
5	1.6	66	105
4	1.3	103	163
3	1.0	182	290
2	0.6	410	653
1	0.3	1641	2613

38° / 3000K




H(m)	φ (m)	lux med. 3000 K	lux max. 3000 K
5	3.4	27	45
4	2.8	43	71
3	2.1	76	125
2	1.4	170	282
1	0.7	681	1129

38° / 4000K




H(m)	φ (m)	lux med. 4000 K	lux max. 4000 K
5	3.4	29	48
4	2.8	45	74
3	2.1	80	132
2	1.4	179	297
1	0.7	717	1188

65° / 3000K



H(m)	φ (m)	lux med. 3000 K	lux max. 3000 K
5	6.3	10	21
4	5.1	16	33
3	3.8	28	58
2	2.5	64	131
1	1.3	255	524

65° / 4000K



H(m)	φ (m)	lux med. 4000 K	lux max. 4000 K
5	6.3	11	22
4	5.1	17	34
3	3.8	30	61
2	2.5	67	138
1	1.3	268	552

THINK BOLLARD - THINK BULLARD

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA