



# CORE 6


ROUND, DIRECT/INDIRECT ILLUMINATION



## SPECIFICATIONS

<b>PROFILE</b>	Round
<b>SIZES</b>	6" diameter
<b>LED OUTPUT</b>	500lm - 4,000lm
<b>CCT/CRI</b>	2700K/3000K/3500K/4000K • 90CRI or BIOS
<b>DIMMING/ DRIVER</b>	Internal, Canopy, and Remote Driver: 0-10V, Phase, DALI, DMX, eldoLED, Lutron®, PoE (Molex, Igor, NuLEDs). Dimming to 0% for select models.
<b>POWER</b>	6.8W to 116.6W per fixture
<b>INPUT</b>	100VAC to 277VAC Phase dimmable versions are 120VAC only.
<b>OPTICS</b>	15° - 80° distribution spun aluminum reflectors. Field replaceable without tools.
<b>FINISHES</b>	Powder coat - TGIC polyester
<b>MATERIAL</b>	Extruded aluminum with galvanized steel hardware
<b>ENVIRONMENT</b>	Indoor dry or damp locations

## DISTRIBUTIONS & PROFILES

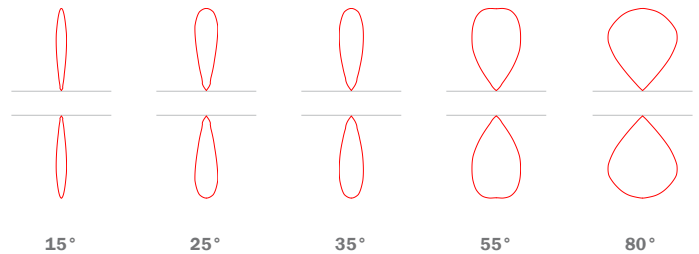


Available in any combination of distributions for direct and indirect.


CORE 6  
DIRECT/INDIRECT  
PENDANT




CORE 6  
DIRECT/INDIRECT  
SCONCE



CORE 6  
DIRECT/INDIRECT  
PENDANT



CORE 6  
DIRECT/INDIRECT  
SCONCE



Not to scale. Dimensions are nominal. Consult factory for CAD drawing.

\*Safety and Performance information available on last page. Output and other specifications available on page 6.





## PRODUCT SUBMITTAL QUICK WORKSHEET

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----

**EXAMPLE: CRT6 – 20902725HL – 20902725HL – RV00 – 2C – BABK/12 – NLT – EMB**  
 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

1. MODEL (CHOOSE 1)	2. OUTPUT - DIRECT* (CHOOSE 1)	3. CRI - DIRECT* (CHOOSE 1)	4. CCT - DIRECT* (CHOOSE 1)
<input type="checkbox"/> <b>CRT6</b> Pendant <input type="checkbox"/> <b>CRU6</b> Sconce	<input type="checkbox"/> <b>05<sup>1</sup></b> 500lm <input type="checkbox"/> <b>10</b> 1000lm <input type="checkbox"/> <b>15</b> 1500lm <input type="checkbox"/> <b>20</b> 2000lm <input type="checkbox"/> <b>25</b> 2500lm <input type="checkbox"/> <b>30</b> 3000lm <input type="checkbox"/> <b>35</b> 3500lm <input type="checkbox"/> <b>40</b> 4000lm  <small><sup>1</sup>See BIOS Dynamic supplement pages 7-8 for BIOS lamping options.  <sup>2</sup>Available for V01 dimming only.</small>	<input type="checkbox"/> <b>90</b> 90 <input type="checkbox"/> <b>BD<sup>3</sup></b> BIOS Dynamic  <small><sup>3</sup>Dynamic BIOS SkyBlue® 490nm LED can be tuned out with most LED driver and dimmer combinations. See pages 7-8 for details.</small>	<input type="checkbox"/> <b>27<sup>4</sup></b> 2700K <input type="checkbox"/> <b>30</b> 3000K <input type="checkbox"/> <b>35</b> 3500K <input type="checkbox"/> <b>40</b> 4000K  <small><sup>4</sup>Not available in BIOS Dynamic.</small>

5. REFLECTOR - DIRECT (CHOOSE 1)	6. OPTICAL ACCESSORY - DIRECT (CHOOSE 1)	7. OUTPUT - INDIRECT* (CHOOSE 1)	8. CRI - INDIRECT* (CHOOSE 1)
<input type="checkbox"/> <b>15</b> 15° (0.3 S/MH) <input type="checkbox"/> <b>25</b> 25° (0.4 S/MH) <input type="checkbox"/> <b>35</b> 35° (0.6 S/MH) <input type="checkbox"/> <b>55</b> 55° (0.9 S/MH) <input type="checkbox"/> <b>80</b> 80° (1.4 S/MH)  <small>*Beam angles noted above are nominal.</small>	<input type="checkbox"/> <b>NN</b> None <input type="checkbox"/> <b>HL</b> Honeycomb Louver <input type="checkbox"/> <b>DF</b> Diffusion Lens <input type="checkbox"/> <b>LS</b> Linear Spread Lens (60° x 1°) <input type="checkbox"/> <b>WW</b> Wall Wash Lens (shifts beam 20° from vertical)	<input type="checkbox"/> <b>05<sup>2</sup></b> 500lm <input type="checkbox"/> <b>10</b> 1000lm <input type="checkbox"/> <b>15</b> 1500lm <input type="checkbox"/> <b>20</b> 2000lm <input type="checkbox"/> <b>25</b> 2500lm <input type="checkbox"/> <b>30</b> 3000lm <input type="checkbox"/> <b>35</b> 3500lm <input type="checkbox"/> <b>40</b> 4000lm  <small><sup>2</sup>See BIOS Dynamic supplement pages 7-8 for BIOS lamping options.  <sup>3</sup>Available for V01 dimming only.</small>	<input type="checkbox"/> <b>90</b> 90 <input type="checkbox"/> <b>BD<sup>3</sup></b> BIOS Dynamic  <small><sup>3</sup>Dynamic BIOS SkyBlue® 490nm LED can be tuned out with most LED driver and dimmer combinations. See pages 7-8 for details.</small>

9. CCT - INDIRECT (CHOOSE 1)	10. REFLECTOR - INDIRECT (CHOOSE 1)	11. OPTICAL ACCESSORY - INDIRECT (CHOOSE 1)	12. DRIVER LOCATION* (CHOOSE 1)
<input type="checkbox"/> <b>27</b> 2700K <input type="checkbox"/> <b>30</b> 3000K <input type="checkbox"/> <b>35</b> 3500K <input type="checkbox"/> <b>40</b> 4000K	<input type="checkbox"/> <b>15</b> 15° (0.3 S/MH) <input type="checkbox"/> <b>25</b> 25° (0.4 S/MH) <input type="checkbox"/> <b>35</b> 35° (0.6 S/MH) <input type="checkbox"/> <b>55</b> 55° (0.9 S/MH) <input type="checkbox"/> <b>80</b> 80° (1.4 S/MH)  <small>*Beam angles noted above are nominal.</small>	<input type="checkbox"/> <b>NN</b> None <input type="checkbox"/> <b>HL</b> Honeycomb Louver <input type="checkbox"/> <b>DF</b> Diffusion Lens <input type="checkbox"/> <b>LS</b> Linear Spread Lens (60° x 1°) <input type="checkbox"/> <b>WW</b> Wall Wash Lens (shifts beam 20° from vertical)	<input type="checkbox"/> <b>R</b> Remote <input type="checkbox"/> <b>D</b> Deep Canopy <input type="checkbox"/> <b>N</b> Internal  <small>*See Dimming/driver location compatibility on page 7 to ensure correct dimming specification.</small>

13. DIMMING* (CHOOSE 1)	14. NUMBER OF CIRCUITS (CHOOSE 1)	17. SHELL COLOR* (CHOOSE 1)	16. SUSPENSION* (CHOOSE 1)
<input type="checkbox"/> <b>V00</b> (0-10V, dim to 0%) <input type="checkbox"/> <b>V01</b> (0-10V, dim to 1%) <input type="checkbox"/> <b>P01</b> (Phase, dim to 1%) <input type="checkbox"/> <b>ELDV0<sup>2</sup></b> (eldoLED, 0-10V, dim to 0%) <input type="checkbox"/> <b>LDE1<sup>3</sup></b> (Lutron ECOSYS1, 0-10V, dim to 1%) <input type="checkbox"/> <b>LTEA<sup>4</sup></b> (Lutron HI-Lume, Phase dim, 2-wire to 1%) <input type="checkbox"/> <b>DALI<sup>5</sup></b> (DALI, dim to 0%) <input type="checkbox"/> <b>DMX<sup>6</sup></b> (DMX, dim to 0%) <input type="checkbox"/> <b>POEM<sup>4</sup></b> (POE Molex) <input type="checkbox"/> <b>POEI<sup>4</sup></b> (POE IGOR) <input type="checkbox"/> <b>POEN<sup>4</sup></b> (POE Nuleds) <input type="checkbox"/> <b>POE<sup>4,5</sup></b> (POE Ready)	<input type="checkbox"/> <b>1C</b> 1 Circuit <input type="checkbox"/> <b>2C</b> 2 Circuits	<b>FINISHES**</b> <input type="checkbox"/> <b>SG</b> <input type="checkbox"/> Silver Gray <input type="checkbox"/> <b>SW</b> <input type="checkbox"/> Satin White <input type="checkbox"/> <b>SB</b> <input type="checkbox"/> Satin Black <input type="checkbox"/> <b>---</b> Specify Finish Code (Ex: OB = Oil-Rubbed Bronze)  <b>SPECIAL ORDER FINISHES**</b> <input type="checkbox"/> <b>RAL_____</b> Specify RAL Classic Color (Ex: RAL 3003) - <input type="checkbox"/> <b>CAT_____</b> Specify Catalog Colors <input type="checkbox"/> <b>CCM_____</b> Specify Custom Color Match  <small>*See page 6 for finish chart.  <sup>2</sup>Manually type the finish code into the parametric code above.</small>	<input type="checkbox"/> <b>BK</b> Black Cord <input type="checkbox"/> <b>WH</b> White Cord <input type="checkbox"/> <b>CB</b> Clear Braided Cord  <small>*Dual aircraft cable + cord suspension.  <sup>3</sup>Cable length field adjustable. Standard cord length 6ft, for longer cords, type desired length into product code above (i.e BK/8 = Black Cord + 8ft cord length).</small>

\*See 'Driver', 'Sensor', and 'dimming/driver compatibility charts for sensor and dimming compatibility.  
<sup>1</sup>Consult factory for BIOS Dynamic dimming options.  
<sup>2</sup>Not available with internal driver (N) location.  
<sup>3</sup>POE drivers only compatible with remote driver (R) location. Driver size may change depending on lumen package.  
<sup>4</sup>Choose if desired PoE solution not listed. Contact customer service to review and confirm the PoE system of your choice.

CONTINUES ON NEXT PAGE →

SS060822



## PRODUCT SUBMITTAL QUICK WORKSHEET

**EXAMPLE: CRT6 – 20902725HL – 20902725HL – RV00 – 2C – BABK/12 – NLT – EMB**  
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

<b>17. SENSOR OPTIONS*</b> (OPTIONAL CHOOSE 1)	<b>18. EMERGENCY OPTIONS*</b> (OPTIONAL)
--	--

- WLNx** (Cooper Wavelinx, remote)
- ENLIGHT** (Enlighted, remote)
- FCJS** (Lutron, remote)
- FCJS/S** (Lutron, remote, occ/daylight sensor)
- MLX** (Molex POE, remote)
- NLT** (nLight wired remote connection)
- NLTAIR** (nLight AIR, remote connection, integral occ/daylight sensor)
- OS/PH/HV** (Hubbel WASP remote occ/daylight sensor)

- EMB\*** Emergency Battery
- \*Emergency options only available with 0-10V driver options. Third party inverter system recommended for other driver options. Refer to [ALW EM Solution Catalog](#) for all compatibility exceptions.
- †Available for deep canopy and remote driver location only.

\*Default quantity is 1 sensor per fixture, type alternate quantity (##) into product code above if desired and contact ALW to request price adjustment. Sensor descriptions available on page 10.


†Not all sensors are compatible with all drivers. See 'Driver', 'Sensor' and lamping charts for driver details and sensor compatibility.

‡Available for remote driver location only.




## DIMENSIONS AND MOUNTING

**CORE 6  
PENDANT**

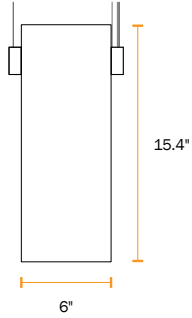


**CORE 6  
SCONCE**

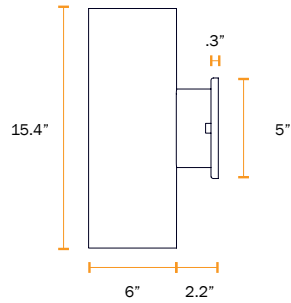

### REMOTE DRIVER

STANDARD SHALLOW CANOPY


**PENDANT ONLY**

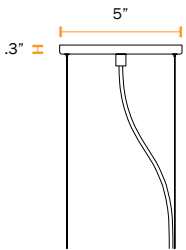


### DEEP CANOPY MOUNTED DRIVER<sup>7</sup>

DEEP CANOPY FOR CANOPY MOUNTED LED DRIVERS

**PENDANT ONLY**

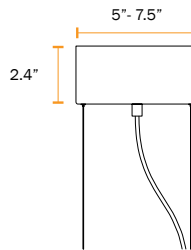

**SCONCE ONLY**

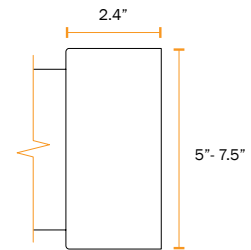


Not to scale. Dimensions are nominal. Consult factory for CAD drawings.  
All canopies fit standard 3.5" and 4" round and octagonal junction boxes.  
<sup>7</sup>Deep canopy diameter depends on LED driver size




## FINISHES

### BASIC POWDER COAT

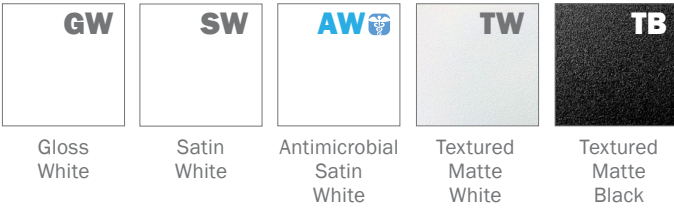


### METALLIC POWDER COAT

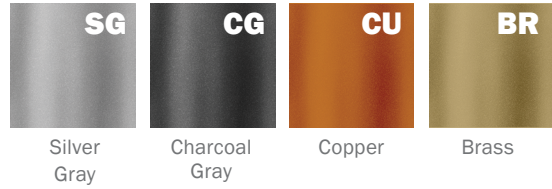


### SATIN ANODIZED EFFECT POWDER COAT



### GLOSS POWDER COAT (80-95% GLOSS)

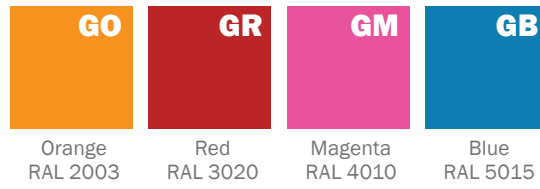

### ALUMINUM\*



Contact ALW Quotes for sample paint finish swatches.

\*Brushed aluminum finish available for an additional fee.

## SPECIAL ORDER FINISHES\*



### RAL CLASSIC COLORS (80-95% GLOSS): RAL\_ \_ \_ \_

Most RAL Classic Colors are available for a minimum setup fee. On your specification submittal choose your RAL color by entering the 4-digit RAL code (Ex: RAL 3003). See [www.alwusa.com/finishes](http://www.alwusa.com/finishes).



### CUSTOM COLOR MATCH: CCM\_ \_ \_ \_

Custom powder coat color matching is available for a premium setup fee. Consult ALW for additional information.



### CATALOG COLORS: CAT\_ \_ \_ \_

The complete range of powder coat colors from Tiger Drylac and TCI catalogs are available for a minimum setup fee. Consult ALW for a catalog color you would like to specify.

\*An individual setup fee will apply to each unique Special Order Finish per purchase order.  
(ex: RAL 5023 and RAL 2008 are specified for multiple line items on a purchase order. 2x setup fees will apply)

\*Printed or on-screen colors are only approximations - consult actual Color Chip Set before specifying)

## CORD OPTIONS



Black  
Order Code = **BK**  
  
For all locations



White  
Order Code = **WH**  
  
For all locations



Clear Silver Braid  
Order Code = **CB**  
  
For dry and damp locations only



## PERFORMANCE DETAILS

REFLECTOR OPTION	CRI	DELIVERED LUMENS <sup>9</sup>	EFFICACY (LM/W)	WATTS(W)	CCT OPTIONS
<b>15°</b> <b>25°</b> <b>35°</b> <b>55°</b> <b>80°</b>	Ra = 90 ± 3	500	147	3.4	2700K 3000K 3500K 4000K
		1000	137	7.3	
		1500	130	11.5	
		2000	126	15.9	
		2500	122	20.4	
		3000	119	25.2	
		3500	115	30.3	
		4000	112	35.5	
		4500	111	40.6	
		5000	109	46	
		5500	106	51.6	
		6000	103	58.3	

\*Based on 55deg reflector for all outputs, 4000K 90CRI.

\*Refer to IES files for full performance data.

<sup>9</sup>Actual lumens measured in field may differ +/- 10%.

## TM-30-18 DETAILS (90 CRI LAMPING)

CCT	CRI (Ra)	CRI (R9)	TM-30 Rf	TM-30 Rg
2700K	90.5	59.7	89.4	99.6
3000K	92.5	66.5	89.9	98.7
3500K	93.8	74.2	89.8	98.1
4000K	94.2	78.8	89.8	98.5




## BIOS OVERVIEW



BIOS SkyBlue® technology is designed to provide the specific circadian stimulus required to improve overall sleep by **featuring a distinct peak in the 'skyblue' spectral power at 490nm**. Unlike traditional white LEDs, BIOS SkyBlue® makes it possible to achieve **high EML (Equivalent Melanopic Lux) and Melanopic/Photopic ratios** without harsh CCTs or high, glare-inducing light levels.

BIOS light engines are available for cylinder products with a **Dynamic** options for use with a variety of applications. Dynamic options include a dynamic board and Bio-Dimmer module to allow the user to dim-out the SkyBlue 490nm signal during night time hours.

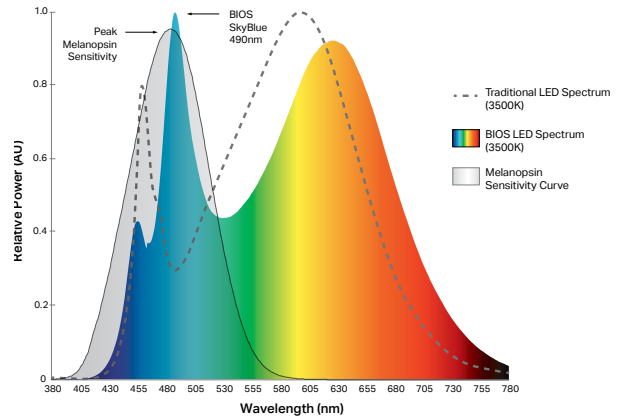

BIOS DYNAMIC + BIO-DIMMING (BIOSD)	
<b>DESCRIPTION</b>	Dynamic light engine with Bio-Dimming add the ability to fine-tune and dim-out the 490nm SkyBlue signal during night time hours or as desired.
<b>TYPICAL APPLICATIONS</b>	Environments occupied for a 24-hour period such as hospitals, security facilities, behavioral health facilities, factories, etc.
<b>CONTROLS &amp; DIMMING</b>	Works with any standard dimming controls (0-10V, Dali, EcoSystem, Triac, DMX, Wireless, etc.). BIOS SkyBlue® LED can be dimmed-out using a standard control/dimmer.

### BIOS LED LAMPING DETAILS (DYNAMIC)

DELIVERED LUMENS <sup>10</sup>	WATTS (W)	EFFICACY (LM/W)
500	5.4	93
1000	11.1	90
1500	18.3	82
2000	23.8	77

### BIOS LED PERFORMANCE DETAILS

CCT	CRI (R9) <i>Dynamic BIOS</i>	DAYTIME M/P RATIO <sup>11</sup> <i>Dynamic BIOS</i>	NIGHTTIME M/P RATIO <sup>11</sup> <i>Dynamic BIOS</i>	COI <sup>12</sup> <i>Dynamic BIOS</i>
3000K	83	0.73	0.45	3.3
3500K	83	0.84	0.50	3.1
4000K	83	0.95	0.55	3.1

<sup>10</sup>Delivered Lumens calculations are based on LM-79 test of BIOS 4000K, 2000lm output.

<sup>11</sup>Melanopic to photopic (M/P) ratios are used to help calculate equivalent melanopic lux (EML) values which is the metric used for circadian lighting in the WELL™ Building Standard.

<sup>12</sup>BIOS SkyBlue® meets the Cyanosis Observation Index (COI) requirements for visual assessment of cyanosis, providing a COI up to 3.3.




## BIOS DYNAMIC + BIO-DIMMING DIMMING CONTROL CHARACTERISTICS

	DIMMER SETTING	BIOS SKYBLUE® LED	WHITE LED	LIGHT OUTPUT	
	100%* (Full On)	100%	100%	100%	Bio-Dimming
	99% - 51%	100% - 0%	100%	100% - 90%	
	50%	NO BIOS	100%	~90%	White LED Intensity Dimming
	49% - 0%	NO BIOS	100% - 0%	Linear Dimming 90% - 0%	


BIOS SkyBlue® maintained for maximum circadian impact.  
 Light output remains relatively constant.

BIOS SkyBlue® removed to provide minimal circadian impact.  
 White LED output dims linearly.


Dynamic BIOS Lumen Output vs. Driver Current

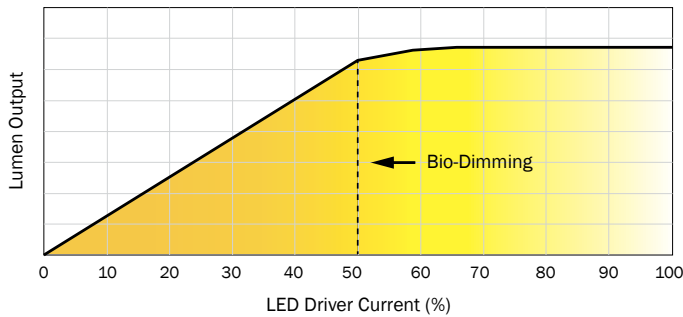

BIOS + Bio-Dimming™

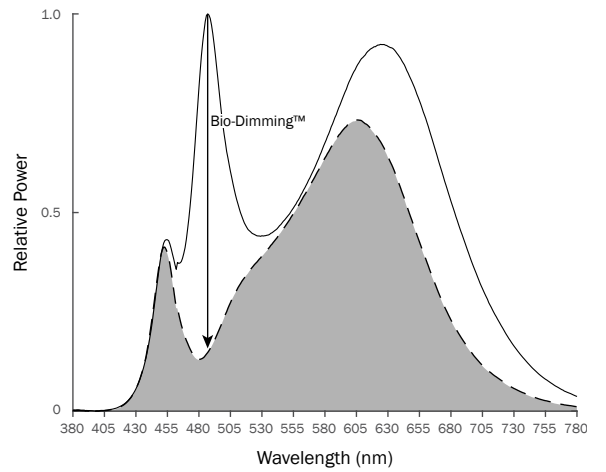

Dynamic BIOS SkyBlue vs. Driver Current

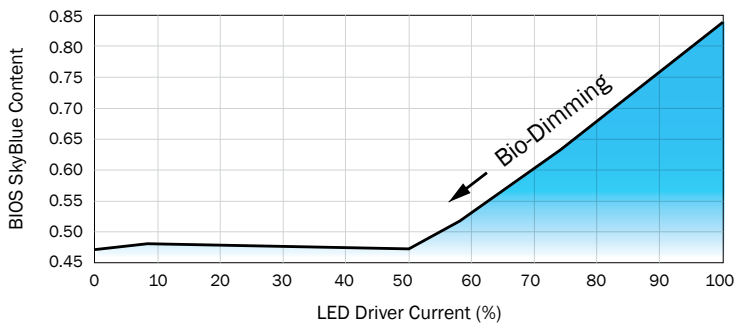



## DRIVERS

PRODUCT CODE	DESCRIPTION
V00	0-10V dimming down to 0%
V01	0-10V dimming down to 1%
P01	ELV/TRIAC Phase dimming down to 1%
ELDVO	eldoLED, 0-10V dimming down to 0%
DALI	DALI flicker-free dimming down to 0%.
DMX	DMX flicker-free dimming down to 0%.
LDE1	ECOSYS1, (LDE1) Lutron Hi-lume 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology
LTEA	LTEA. Lutron Hi-lume 1% 2-wire TRIAC dimming (120V forward-phase only)
POEM	POE MOLEX. Molex CoreSync PoE LED Driver dimming down to 0%
POEI	IGOR PoE LED Driver. Contact ALW to assist with your project.
POEN	NuLEDS PoE LED Driver. Contact ALW to assist with your project.
POE	PoE Ready LED Driver. Contact ALW to assist with your project.

\*Contact ALW for specific dimming level requests. ALW lighting fixtures are intended for use with a wide range of sensors, lighting controls, LED drivers, and building management systems. If there are specific components required for your application that aren't listed on this spec sheet, please contact ALW customer support today to specify a compatible solution of your choice.

DRIVER/LED LAMPING COMPATIBILITY				
	STD*	BIOS	CA TITLE 24 JA8/JA10 <sup>13</sup>	IEEE P1789 & HD TV STUDIO <sup>14</sup>
V00	●	●	●	
V01	●	●	●	
P01	●	●	●	
ELDVO	●	●	●	●
DALI	●	●	●	●
DMX	●	●	●	●
LDE1	●	●	●	●
LTEA	●	●	●	
POEM	PER REQUEST		●	●
POEI	PER REQUEST		●	●
POEN	PER REQUEST		●	●
POE	PER REQUEST		●	●

DRIVER LOCATION/DRIVER COMPATIBILITY			
	INTERNAL	DEEP CANOPY	REMOTE
V00	●	●	●
V01	●	●	●
P01	●	●	●
ELDVO		●	●
DALI		●	●
DMX		●	●
LDE1		●	●
LTEA		●	●
POEM			●
POEI			●
POEN			●
POE			●

● - Indicates compatibility

\*Standard lamping (STD) - 500-6000lm

<sup>13</sup>Fixtures specified with 90CRI 2700K, 3000K, 3500K, and 4000K lamping with applicable LED drivers have the ability to conform to California Title 24 JA8 and JA10 Appendices.

<sup>14</sup>The following drivers conform to IEEE P1789 Flicker Standard: 'IEEE Recommended Practices for Modulating Current in High-Brightness LEDs for Mitigating Health Risks to Viewers'. These drivers may also be installed in HD TV Studio applications utilizing high frequency camera equipment.

SS060822



**SENSORS\***

	PRODUCT CODE	DESCRIPTION	DRIVER LOCATION	SENSOR LOCATION
	<b>N</b>	None. Choose when sensors are not desired.	-	-
<b>COOPER</b>	<b>WLNx</b>	Fixture is built with 0/10V wiring to connect to Wavelinx Wireless sensors and power/relay packs (sensors and equipment not provided by ALW)	Internal Deep Canopy Remote	Remote
<b>ENLIGHTED™</b>	<b>ENLGHt</b>	Enlighted® remote connected lighting smart sensor - occ/daylight/networking (Enlighted Part: SU-5S-H-CL)	Remote	
<b>LUTRON VIVE</b>	<b>FCJS</b>	Lutron® Vive remote RF wireless fixture control (Lutron Part: FCJS-ECO or FCJS-010)	Remote	
	<b>FCJS/S</b>	Lutron® Vive remote RF wireless fixture control + daylight/occ sensor (Lutron Part: FCJS-ECO or FCJS-010, & FC-Sensor)	Remote	
<b>MOLEX POE CORESYNC</b>	<b>MLX</b>	Molex PoE sensors for use with Molex/PoE drivers. Customer will need to determine who to purchase PoE equipment from.	Remote	
<b>NLIGHT WIRED®</b>	<b>NLT</b>	Fixture is built to connect to nLight Wired remote components specified by agency. Contact ALW to review project details.	Remote	
<b>NLIGHT WIRELESS®</b>	<b>NLTAIR</b>	Fixture is built to connect to nLight Air (Wireless) remote components specified by agency. Contact ALW to review project details.	Remote	
<b>VALUE SENSORS</b>	<b>OS/PH/HV</b>	<i>Hubbell WASP High Voltage 0-10V remote surface mount occ/daylight sensor. 120/277/347VAC input (Hubbell Part: WSPDSMUNV) Automated Dimming Functionality: Connect fixture 0/10V wires to sensor in the field. Adjust occ/photocell settings as desired. On/Off or Manual Dimming Functionality: Turn photocell functionality OFF. Cap off 0/10V wires on sensor. Connect fixture 0/10V wires to wall dimmer in the field.</i>	Internal Deep Canopy Remote	

\*All connected lighting sensors/systems must be programmed in the field by an electrical commissioner familiar with the system. Refer to the 'Sensor Compatibility' and 'Driver/Sensor Compatibility' charts to specify compatible sensors, LED lamping, and LED driver systems.

SENSOR COMPATIBILITY					
PRODUCT CODE		SENSOR TYPE	MAX MT HT	CA TITLE 24	STD*
<b>COOPER WAVELINX</b>	<b>WLNx</b>		15 ft	●	●
<b>ENLIGHTED™</b>	<b>ENLGHt</b>	OCCUPANCY/PHOTOCELL	40 ft	●	●
<b>LUTRON VIVE</b>	<b>FCJS</b>	WIRELESS CONTROL	12 ft	●	●
	<b>FCJS/S</b>	OCCUPANCY/PHOTOCELL	12 ft	●	●
<b>MOLEX POE CORESYNC</b>	<b>MLX</b>		16 ft	●	●
<b>NLIGHT WIRED</b>	<b>NLT</b>		15 ft	●	●
<b>NLIGHT WIRELESS</b>	<b>NLTAIR</b>		15 ft (average)	●	●
<b>VALUE SENSORS</b>	<b>OS/PH/HV</b>	OCCUPANCY/PHOTOCELL	45 ft	●	●

● - Indicates compatibility    ■ - On/off sensor functionality only

\*Standard lamping (STD) - 500 - 6000LM

DRIVER/SENSOR COMPATIBILITY									
	WLNx	ENLGHt	MLX	FCJS	FCJS/S	NLT	NLTAIR	OS/PH/HV	NO SENSOR
<b>V00</b>	●	●		●	●			■	●
<b>V01</b>	●	●		●	●			■	●
<b>P01</b>								■	●
<b>ELDV0</b>						●	●	▲	●
<b>DALI</b>								■	●
<b>DMX</b>								■	●
<b>LDE1</b>				●	●				●
<b>LTEA</b>								■	●
<b>POEM</b>			●						●
<b>POEI</b>	Sensor types will depend on the PoE system configuration. Contact ALW for details.								
<b>POEN</b>	Sensor types will depend on the PoE system configuration. Contact ALW for details.								
<b>POE</b>	Sensor types will depend on the PoE system configuration. Contact ALW for details.								

● - Indicates compatibility

▲ - Fixture can have automated dimming via sensor OR on/off functionality and manual dimming

■ - On/off sensor functionality only



**PHOTOMETRICS CORE 6**

BEAM ANGLE (°)	POLAR PLOT (CD)	MTG HEIGHT (FT)	LIGHT LEVEL (FC)	BEAM DIAMETER (FT)	SPACING CRITERION (SC) <sup>15</sup> (0° - 180°) (90° - 270°)	MAX INTENSITY (CD)
15°		6	842.3	1.5	.24 .24	30324
		8	473.8	2.0		
		10	303.2	2.5		
		12	210.6	3.0		
		14	154.7	3.5		
		16	118.5	3.9		
25°		6	292.0	2.9	.46 .46	10510
		8	164.2	3.9		
		10	105.1	4.9		
		12	73.0	5.8		
		14	53.6	6.8		
		16	41.1	7.8		
35°		6	226.0	3.4	.53 .53	8136
		8	127.1	4.6		
		10	81.4	5.7		
		12	56.5	6.9		
		14	41.5	8.0		
		16	31.8	9.1		
55°		6	86.0	7.4	.95 .95	3118
		8	48.4	9.8		
		10	31.0	12.3		
		12	21.5	14.7		
		14	15.8	17.2		
		16	12.1	19.6		
80°		6	64.3	10.1	1.21 1.21	2314
		8	36.2	13.5		
		10	23.1	16.9		
		12	16.1	20.3		
		14	11.8	23.7		
		16	9.0	27.0		

\*Photometric calculations based on 3000lm 4000K 90CRI fixture combination. Actual results may vary in the field.

For footcandle and output multipliers refer to the [ALW IES File Multipliers Chart](#).

<sup>15</sup>Spacing criterion refers to maximum distance luminaires can be spaced to provide uniform illumination on the working plane or surface.

Luminaire spacing = Spacing Criterion (SC) x Mounting Height (MH) (ex. 1.14 (SC) x 10' (MH) = 11.4' Luminaire Spacing).



## ADDITIONAL OPTIONS & SPECIFICATIONS

### LED PERFORMANCE

> 55,000 hours at 80% lumen maintenance, LM80 / TM-21

### COLOR CONSISTENCY

3 SDCM; 90 CRI typical

### HOUSING

Extruded aluminum with galvanized steel hardware

### SAFETY & REGULATORY

Can be used to comply with **Title 24 JA8 and JA10** requirements. Contact ALW customer support today and we can help you with your project requirements.

UL Listed (U.S. & Canada). Suitable for dry or damp locations. Conforms to UL 1598, 2108, 8750 Certified to CSA std. CSA C22.2# 9 & #250.0

### OPERATING TEMPERATURE

Luminaire should be installed and operated **ONLY** in dry or damp environments where the ambient temperature ranges from -4 °F to 104 °F ( -20 °C to 40 °C). Luminaire operation in environments outside the listed temperature range voids the warranty AND may damage the product or adversely impact lamp life, lumen output and color consistency.

### WOOD VENEER

Most ALW fixture configurations are available with **real wood veneer** as a custom request. Contact **ALW customer support** so we can help you with your custom wood veneer request.

### CONTROLS, SENSORS, & LED DRIVER

ALW lighting fixtures are intended for use with a wide range of sensors, lighting controls, LED drivers, and building management systems. Our component portfolio is continually expanding to adopt to the latest technologies and specification needs. We currently support integration with Lutron, Enlighted, EldoLED, nLight, Osram, Philips, and more. If there's a component or system needed that you don't see on the spec sheet please contact ALW customer support today so we can review your requirements.

### WARRANTY

LIMITED WARRANTY. Visit [alwusa.com/warranty](http://alwusa.com/warranty) for more information.

### WEIGHT

CORE 6	
PENDANT	SCONCE
9 lbs/ 4.1 kg	9 lbs/ 4.1 kg